



Bakery & Food Processing Equipment  
Professional Kitchen Equipment  
Commercial Refrigeration Equipment  
Work Table & Equipment Stands

engineering redefined



**tronic**  
**Equipments**

**YOUR FOODSERVICE SOLUTION**



[www.qtronicequipments.com](http://www.qtronicequipments.com)

# Food Mixer & Spiral Mixer

## Food Mixer

### 5L Food Mixer



**LR-FM-5**

220V,50Hz,0. 3kw  
Capacity: 5L  
Mixing Speed: 131~852r/min  
Net Weight: 25kg  
Dimensions: 370x230x410mm

CE

### 7L Food Mixer




**LR-FM-7**

220V,50Hz,0. 35kw  
Capacity: 7L  
Mixing Speed: 151~852r/min  
Net Weight: 30kg  
Dimensions: 410x250x425mm

CE

### 5L Food Mixer



**LR-BM-5A**

220V,50Hz, 0. 37kw  
Capacity: 5L  
Mixing Speed: 85~530r/min  
Net Weight: 24kg  
Dimensions: 430x240x415mm

CE

### 20L Economic Food Mixer



**B20C**

220V,50Hz,0. 75kw  
Capacity:20 L  
3-speed driven:113/168/386r/min  
Max kneading capacity:8kg  
Net Weight:75kg  
Dimension:430x540x780mm

CE

## HTD Spiral Mixer



HTD Series



HTD-B Series  
Two Mixing Speed



Model	Bowl Volume (L)	Power (kw)	Voltage (V)	Mixing Speed (r/min)	Bowl Speed (r/min)	Max Kneading Capacity (kg)	Net Weight (Kg)	Dimension (mm)
HTD20	20	1.5	220V/60Hz/3Ph	156	16	8	150/134	750x400x730
HTD20B	20	1.5/1.1	380V/50HZ/3Ph					
HTD30	30	1.5	220V/60Hz/3Ph	156	16	12	160/142	790x430x830
HTD30B	30	1.5/1.1	380V/50HZ/3Ph					
HTD40	40	2.2	220V/60Hz/3Ph	156	16	16	202/173	860x430x930
HTD40B	40	2.2/1.5	380V/50HZ/3Ph					


Note:Design and specification are subject to change without notice

## PM Power Mixer

### Features

- The R-shape handle design is easy to operate.
- A louvered ventilation slot short and short spacing design is beneficial for water woot and better prevents foreign matters in.
- Press on protect button can avoid the woring operation effectively.
- Continuous works is secured by locking press button.
- Being detached is made easily by screw-type connection design.

- Permanent magnet DC motor with high efficiency ratio, small size ,light weight and long operating life.
- Handle designed for easy grip and effortless use.
- The foot, blades and tube can all be taken a part for cleaning to ensure perfect hygiene.
- The model with T have the variable speed button is positioned at the top of the appliance for greater visibility and easier adjustment.
- The tube, bell and blades are made from Stainless steel to ensure a longer life span.

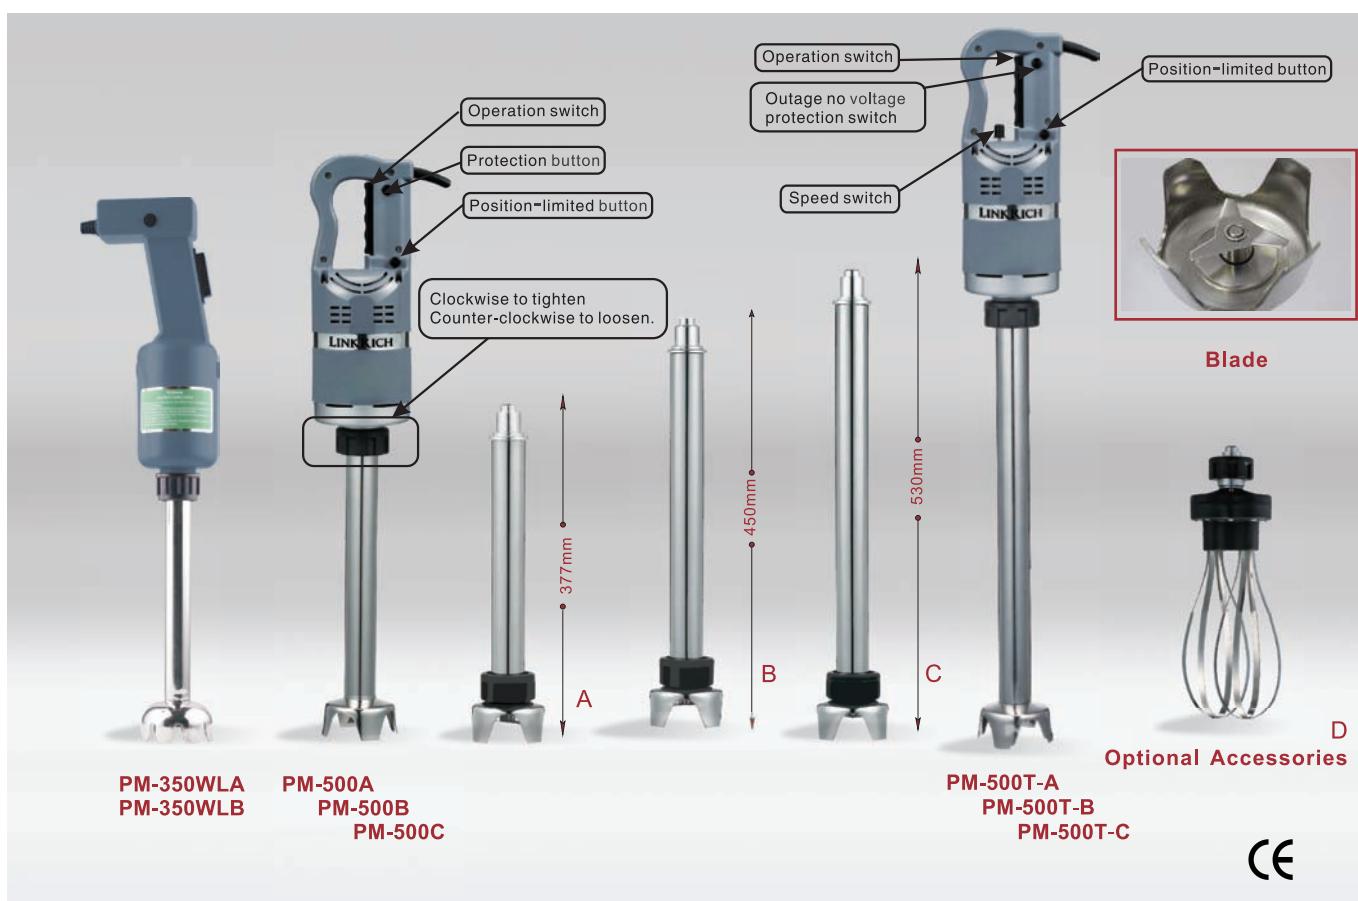

Model	Voltage (V)	Power (kw)	Mixing Speed (r/min)	Net Weight (kg)
PM-350WLA	220	0.37	12000	1.8
PM-350WLB	220	0.37	12000	1.8
PM-500A	220	0.55	12000	4
PM-500B	220	0.55	12000	4
PM-500C	220	0.55	12000	4
PM-500T-A	220	0.55	3800~12000	4
PM-500T-B	220	0.55	3800~12000	4
PM-500T-C	220	0.55	3800~12000	4
PM-500T-AD	220	0.55	3800~12000	6
PM-500T-BD	220	0.55	3800~12000	6
PM-500T-CD	220	0.55	3800~12000	6



# Spiral Mixer & Paste Dividing Machine & Paste Dividing Rolling Machine

## Paste Dividing Machine

### Features

- Stainless steel outer structure, beautiful and good-looking.
- Easy adjustment for different dough weight from 30-100g.
- Cutting knives of stainless steel.
- Working smoothly and low noise.
- With four wheels, it is convenient to move.
- Hydraulic system for gentle dough treatment and perfect product.



**CG-36**  
Voltage: 380V  
Power: 0.75kw  
Productivity: 36pcs/time  
Dividing Weight: 30~120g/pcs  
Net Weight: 193kg  
Dimensions: 400x500x1300mm



**LRF-20H**  
Voltage: 380V  
Power: 2.2kw  
Productivity: 20pcs/time  
Dividing Weight: 100~800g/pcs  
Net Weight: 350kg  
Dimensions: 610x680x1000mm

## Manual Paste Dividing Machine

## Paste Dividing Rolling Machine



**LRF-36M**  
Net Weight: 135kg  
Dimensions:  
580x600x1100mm



**Semi-Automatic LRK-30**  
Voltage: 380V  
Power: 1kw  
Productivity:  
0pcs/time  
Dividing Weight:  
30~100g/pcs  
Net Weight: 345kg  
Dimensions:  
650x710x2100mm



**Automatic LRF-30**  
Voltage: 380V  
Power: 2kw  
Productivity:  
30pcs/time  
Dividing Weight:  
30~100g/pcs  
Net Weight: 440kg  
Dimensions:  
650x730x1440mm

# Bread Moulder Machine & Embroidering Machine & Dough Sheeter

## Bread Moulder Machine



**CG-38**

Voltage: 380V  
Power: 0.75kw  
Net Weight: 208kg  
Dimensions: 1050x500x1300mm

## Bread Slicer



**CG-31/CG-37**

Voltage: 220V  
Power: 0.25kw  
Quantity: 31/37pcs  
Thickness: 12mm  
Net Weight: 65kg  
Dimensions: 650x610x750mm

## Embroidering Machine



**CG-701**

Air pressure: 0.3-0.5MPa  
Net Weight: 73Kg  
Packing speed: 20-30Packages/min  
Apply thin film width: 100-130mm  
Dimensions: 680x550x1030mm

## French Roll Moulder



**LRF-750**

CE  
Voltage: 380V  
Power: 0.75kw  
Productivity: 30~120kg  
Dividing Weight: 50~1250g/pcs  
Net Weight: 284kg  
Dimensions: 610x680x1080mm

## Dough Sheeter



**TSP520**

CE  
Voltage: 220V  
Power: 0.75kw  
Net Weight: 170kg  
Roller Speed: 133r/min  
Dimensions: 2460x880x650mm



**LSP520**

CE  
Voltage: 220V  
Power: 0.75kw  
Net Weight: 280kg  
Roller Speed: 133r/min  
Dimensions: 2460x880x1240mm



# Meat Mincer

## TT Meat Mincer



CE



CE



CE

### TT-12

**Voltage:** 220V  
**Power:** 0.55kw  
**Production Capacity:** 120kg/h  
**Net Weight:** 23kg  
**Dimensions:** 400x190x410mm

### TT-22

**Voltage:** 220V  
**Power:** 0.75kw  
**Production Capacity:** 220kg/h  
**Net Weight:** 42kg  
**Dimensions:** 525x228x390mm

### TT-32

**Voltage:** 220V  
**Power:** 1.5kw  
**Production Capacity:** 300kg/h  
**Net Weight:** 67kg  
**Dimensions:** 680x320x540mm

## TC Meat Mincer

### Features:

- There are 6 threads inside tube and a square meat chute, it can push the meat to be minced to the cutter quickly.
- With protective block plate and screw fixed the meat pan attached to main housing, it can prevent the hands touching the spiral thread.
- Three are three levels gasket sealing from gear box to flange and tube, make sure no oil leak into the tube.
- The tube is locked by two big locking screw with handles, it is convenient to install and dismantle.

### 42# Meat Mincer



CE

**TC-42** Spray-paint  
**TC-42A** Stainless Steel  
**Voltage:** 380V  
**Power:** 4kw  
**Production Capacity:** 650kg/h  
**Net Weight:** 166kg/156kg  
**Dimensions:** 585x1090x1090mm  
530x1020x950mm

### 52# Meat Mincer



CE

**TC-52**  
**Voltage:** 380V  
**Power:** 5.5kw  
**Production Capacity:** 1300kg/h  
**Net Weight:** 418kg  
**Dimensions:** 800x1350x1220mm

# Melon And Fruit Cutter

## Melon and Fruit Cutter

### Features :

- Versatile and efficient you can quickly process food to achieve different result with an excellent finish
- Utmost hygiene: the components are manufactured from materials suitable for food handing and can be easily removed for fast cleaning.
- Ventilated motor: powerful and low-noise can perform all processes effortlessly.
- Controls with low-voltage(24V)switch.
- Machines conforming to CE hygience and safety standards.
- Discs and blades for all kinds of processing.
- Including 5 Discs: G003, G005, G007, SP002, SP004. Others discs is optional.



VC60MS CE



VC65MS CE

### Vegetable Cutter Blade

For grating, slicing, dicing, julienne, etc to fit your every need in vegetable food preparation



For Slicing



SP002

2mm/3Blades



SP004

4mm/2Blades



SA002

2mm/3Blades



SA004

4mm/2Blades



SA006

6mm/2Blades



SA008  
SA010

8mm/1Blades  
10mm/1Blades



For Grater



G002

2mm



G003

3mm



G005

5mm



G007

7mm



G010

10mm



J303/404

3x3mm 4x4mm



For Dicing(SA008/SA010+DS888/DS1000)  
(optional as requires)



SA008 8mm/1Blades



DS888 8x8x8mm



DS1000 10x10x10mm



For French Fries(SA008/SA010+FS808/FS100)  
(optional as requires)



SA008 8mm/1Blades



FS808 8x8mm



FS100 10x10mm

# Melon And Fruit Cutter

## Melon and Fruit Cutter

### Features:

- More multipurpose, it is use to cut vegetable and fruit to all size of pieces, chips and cubes to meet you requirement.
- All parts in contact with food are made of stainless steel.
- With double safe controller to ensure safety.
- Removable hoper head and food pushed , no tools required.



Including C5, C7, C9, C3, AS5

### MFC23

**Voltage:**220V  
**Power:**0.25kw  
**Disc Diameter:**204mm  
**Productivity:**120kg/h  
**Net Weight:**30kg  
**Dimension:**275x580x455mm

### Double Insurance

#### MFC23

**Voltage:**220V  
**Power:**0.25kw  
**Disc Diameter:**204mm  
**Productivity:**120kg/h  
**Net Weight:**30kg  
**Dimension:**275x580x455mm



### Attachment operation

1. C Discs: for slicing and shredding all thicknesses.



C2/C5/C7/C9(2, 5, 7, 9mm) C3(3mm)

2. AS Disc for shredding vegetable and fruit.



As3/As5(≈4mm/5mm)

3. M Discs:for vegetable salads, cubes, etc...must be used with a C disc.



F10(10mm) C10(10mm)

4. P Discs, for finely grating cheese bread-crums, almonds.



P type(≈3mm)

5. F8 Disc for chips vegetable and fruit(optional as requires)



F8(8mm) C8(8mm)

### Attachment operation

Including 5 Discs: H7, H4, H3, P4, P2.  
Others discs is optional.

1. C Discs: for slicing and shredding all thicknesses.



P2(2mm) P4(4mm) E1/E2(1, 2mm) E5(5mm) H8/H10(8, 10mm)

2. AS Disc for shredding vegetable and fruit.



Hu2. 5(2. 5x2. 5mm) Hu4(4x4mm) Hu10(10x10mm)

3. M Discs:for vegetable salads, cubes, etc...must be used with a C disc.



D8/D10/D12/D20(8/10/12/20mm) H8/H10(8, 10mm)

4. P Discs, for finely grating cheese bread-crums, almonds.



H3/H4/H7(3, 4, 7mm)

5. F8 Disc for chips vegetable and fruit. (Optional as requires)



T8/T10(8, 10mm) H8/H10(8, 10mm)

### HLC-300

**Voltage:**220V  
**Power:**0.55kw  
**Net Weight:**22.46kg  
**Dimension:**565x295x565mm

### HLC-300A

**Voltage:**220V  
**Power:**0.55kw  
**Net Weight:**22.22kg  
**Dimension:**540x310x550mm

### HLC-500

**Voltage:**220V  
**Power:**0.6kw  
**Net Weight:**24.5kg  
**Dimension:**630x600x430mm



CE  
HLC-300



CE  
HLC-500



Note:Design and specification are subject to change without notice

# Food Cutter Machine

## LR-QS-S Food Cutter Machine



**LR-QS-3S**



**LR-QS-10S**



A Knife with big S-shape, which has long blade wire.  
So it has the highest cutting efficiency and the best cutting effect.

## LR-QS-L Food Cutter Machine



**HR-6**

**Voltage:**220V  
**Power:**0.75kw  
**Net Weight:**18.86kg  
**Diemension:**565x365x440mm

**HR-9**

**Voltage:**220V  
**Power:**0.75kw  
**Net Weight:**19.92kg  
**Diemension:**570x385x460mm



A Knife with big S-shape, which has long blade wire.  
So it has the highest cutting efficiency and the best cutting effect.

**LR-QS-3L/A~LR-QS-8L/A**

**LR-QS-13L~LR-QS-15L**

Model	Voltage (V)	Power (kw)	Capacity (L)	Cutting Speed(r/min)	Net Weight (kg)	Dimensions (mm)
LR-QS-3LA	220	0.65	3	1400	32	230x300x480
LR-QS-3L	380	0.65	3	1400	32	230x300x480
LR-QS-5LA	220	1.5	5	1400	39	305x380x530
LR-QS-5L	380	1.1/1.5	5	1400/2800	39	305x380x530
LR-QS-8LA	220	2.5	8	1400	56	370x445x615
LR-QS-8L	380	1.5	8	1400	56	370x445x615
LR-QS-13L	380	2.8/3.5	13	1300/2600	140	420x680x720
LR-QS-15L	380	2.8/3.5	15	1300/2600	143	420x680x770

- The body made of aluminium magnesium alloy for the series 3L/5L/8L, which is more durable.
- Water-proof with add two seal ring inside, which is more safe.
- With safty controller, once open the cover, the machine will stop working.
- The bowl made of stainless steel.



Blade for 13L&15L

### Weight of cutting(once)

Model	Pork (kg)	Capsicum (kg)	Ginger, Garlic (kg)	Peanut (kg)	Tomato (kg)
LR-QS-3LA	1.5	1	1.4	1.3	1.5
LR-QS-5LA	2.5	2	2.1	1.7	1.9
LR-QS-8LA	3.5	3	2.8	2.8	2.8
LR-QS-13L	10	5.5	5	5	4
LR-QS-15L	12.5	8	7.5	7.5	6

Variety of Gutting	Time of cutting(secs)
Pork	13
Capsicum	60
Ginger, Garlic	30
Peanut	18
Tomato	15



Blade for 3L&5L&8L

# Sugarcane Presser & Potato Peeler

## Sugarcane Presser



**WY-817**

**Voltage:**220V  
**Power:**0.75kw  
**Capacity:**1.5L  
**Output:**3L/h  
**Net Weight:**68kg  
**Dimensions:**450x440x780mm

304 stainless tumbling box.  
All stainless body.  
Perfesional closed box to  
the more clean,  
no draft leakage



**WY-807**

**Voltage:**220V  
**Power:**0.75kw  
**Capacity:**1.5L  
**Output:**3L/h  
**Net Weight:**63.5kg  
**Dimensions:**440x430x880mm

304 stainless tumbling box.  
750W big power motor to afford the  
energy.  
Use YOKKC of Corea  
reduction box,  
low voice and vibration.



**YZ28A/YZ28B**

**Voltage:**220V  
**Power:**0.55kw  
**Capacity:**1.5L  
**Output:**3L/h  
**Net Weight:**89kg  
**Dimensions:**600x400x930mm

## Potato Peeler

### Features:

Firm wearable, and easy to clean

With good appearance

The potato peeling machine is efficient and energy saving



**PP8/PP8A(S/S)**

**Power:**0.37kw  
**Voltage:**220V  
**Capacity:**8kg  
**Net Weight:**58/53kg  
**Dimensions:**430x410x760mm



**PP15/PP15A(S/S)**

**Power:**0.75kw  
**Voltage:**220V  
**Capacity:**15kg  
**Net Weight:**63/57kg  
**Dimensions:**530x440x800mm



**PP30/PP30A(S/S)**

**Power:**1.5kw  
**Voltage:**220V  
**Capacity:**30kg  
**Net Weight:**125/120kg  
**Dimensions:**780x670x890mm



**PP10 MOQ:10Pcs**

**Power:**0.75kw  
**Voltage:**220V  
**Capacity:**10kg  
**Net Weight:**68kg  
**Dimensions:**630x630x1080mm



# Convection Oven & Convection Oven with Proofer

## YXD Convection Oven

### Features

- Heavy duty fan blade
- Door hinge to be opened at 90°for easy taking out of trays
- Visual glass, easy to keep an eye on cooking process
- Double glass door
- Solenoid valve for manual steaming



**YXD-4A**

220V,50Hz,2.67+2kw  
**Temp.range** 50°C to 300°C  
 Comes with 4x454x327mm  
 Aluminium trays  
**Chamber Size:** 460×375×360 mm  
**Net Weight:**40kg  
**Dimensions:** 595×530×570 mm



- Silicon protective switch
- High efficient stainless steel heating elements
- Anti-slippery foot
- Ceramic coating chamber



**YXD-6A**

220V,50Hz,2.8kw  
**Temp.range** 50°C to 250°C  
 Comes with 4xGN1/1  
**Chamber Size:** 540x440x420mm  
**Net Weight:**70kg  
**Dimensions:** 595×530×570 mm




## DH Convection Oven



**DH4B-B**

**Specification:** Four layers  
**Power:** 2.6kw, **Voltage:** 220V  
**Temperature:** 50~300°C  
**Tray Size:** 434x322x35mm  
**Chamber Size:** 458x335x338mm  
**Net Weight:** 30kg  
**Dimension:** 600x610x556mm



**DH4A-B**

**Specification:** Four layers  
**Power:** 5.2kw, **Voltage:** 220V  
**Temperature:** 20~300°C  
**Tray Size:** 600x400x35mm  
**Chamber Size:** 650x450x360mm  
**Net Weight:** 50kg  
**Dimension:** 796x706x584mm

## Convection Oven With Proofer

### Features

- Hot air circulation heating, high thermal efficiency, uniform heating
- Hot iron by way of spraying water to produce steam, the furnace top and different to produce droplets Pik
- Transparent tempered glass door,the fermentationconditions to monitor the furnace



**YXD-8A Electric Oven**

220V,50Hz,2.8kw  
**Temp.range** 50°C to 300°C  
 With spray function  
 Comes with 4x600x400 trays  
**Chamber Size:** 700x360x460mm  
**Net Weight:**67kg  
**Dimensions:** 834x765x572mm

**YXD-8A+XF Proofer**

220V,50Hz,2kw  
**Temp.range** 30°C to 85°C  
 Comes with 8x600x400 trays  
**Net Weight:**74kg  
**Dimensions:** 834x674x990mm



**DH4A-B+XF08**

220V,50Hz,1.2kw  
**Temp.range** 30°C to 60°C  
**Chamber Size:** 770x610x810mm  
**Net Weight:**58kg  
**Dimensions:** 796x693x1080mm

# Convection Oven

## Convection Oven



CE

**DH6A-A**  
Voltage: 380V  
Power: 9.5kw  
Specification: 6 tray  
Temperature: 20~300°C  
Capacity: 60kg/h  
Net Weight: 127kg  
Tray Size: 600x400x35mm  
Chamber Size: 500x550x710mm  
Dimensions: 1000x946x805mm



CE

**DH12A-A**  
Voltage: 380V  
Power: 19kw  
Specification: 12 tray  
Temperature: 20~300°C  
Capacity: 60kg/h  
Net Weight: 175kg  
Tray Size: 600x400x35mm  
Chamber Size: 500x710x1035mm  
Dimensions: 1000x946x1035mm



Convection Oven With Proofer

**DH6A-A+XF12**  
Voltage: 220V  
Power: 1.5kw  
Specification: 12 tray  
Temperature: 30~60°C  
Capacity: 60kg/h  
Net Weight: 75kg  
Tray Size: 600x400x35mm  
Chamber Size: 2x(430x640x550)mm  
Dimensions: 1000x945x915mm



**EFC-6A**  
Voltage: 380V  
Power: 9.37kw  
Temperature: 0~400°C  
Capacity: 60kg/h  
Net Weight: 150kg  
Dimensions: 1230X900X730mm



**EFC-12A**  
Voltage: 380V  
Power: 18.74kw  
Temperature: 0~400°C  
Capacity: 120kg/h  
Net Weight: 280kg  
Dimensions: 1230X900X1280mm

## Electric Convection Oven

- Full stainless body and it is good looking and clean
- High Efficient Stainless steel heater, and the heating is evenly
- It is with automatic water-input valve, and with the steam function
- It is with automatic and easy control
- Hot air heating design to make the performance better
- With the reset for safety



**EB-600S6**  
Specification: 6 Layers  
Voltage: 220V  
Power: 6.8+6.8kw  
Temperature: 50~300°C  
Tray Size: 600x400mm  
Chamber size: 460x685x460mm  
Net Weight: 212kg  
Dimensions: 835x1065x1390mm



**EB-600S8**  
Specification: 8 Layers  
Voltage: 380V  
Power: 7.3+7.3kw  
Temperature: 50~300°C  
Tray Size: 600x400mm  
Chamber size: 460x685x620mm  
Net Weight: 242kg  
Dimensions: 835x1065x1710mm

## Convection Oven

### Electric Convection Oven



**NFC-3D**

**Specification:** 3 Layers  
**Voltage:** 380V  
**Power:** 6kw  
**Tray Size:** 600x400mm  
**Net Weight:** 110kg  
**Dimensions:** 870x1270x550mm



**NFC-5D**

**Specification:** 5 Layers  
**Voltage:** 380V  
**Power:** 7.5kw  
**Tray Size:** 600x400mm  
**Net Weight:** 150kg  
**Dimensions:** 900x1250x770mm



**NFC-8D**

**Specification:** 8 Layers  
**Voltage:** 380V  
**Power:** 16.5kw  
**Tray Size:** 600x400mm  
**Net Weight:** 214kg  
**Dimensions:** 900x1250x1120mm



**NFC-10D**

**Specification:** 10 Layers  
**Voltage:** 380V  
**Power:** 16.5kw  
**Tray Size:** 600x400mm  
**Net Weight:** 260kg  
**Dimensions:** 900x1250x1120mm



### Gas Convection Oven



**NFC-5Q**

**Specification:** 5 Layers  
**Voltage:** 220V  
**Power:** 0.55kw  
**Tray Size:** 600x400mm  
**Net Weight:** 173kg  
**Dimensions:** 900x1250x950mm



**NFC-8Q**

**Specification:** 8 Layers  
**Voltage:** 220V  
**Power:** 0.75kw  
**Tray Size:** 600x400mm  
**Net Weight:** 255kg  
**Dimensions:** 900x1250x1300mm



**NFC-10Q**

**Specification:** 10 Layers  
**Voltage:** 380V  
**Power:** 0.8kw  
**Tray Size:** 600x400mm  
**Net Weight:** 280kg  
**Dimensions:** 900x1250x1300mm

# Pizza Oven

## LR-CP Electric Conveyor Pizza Oven

### Features

- Front control panel is easy to read and access.
- Variable speed conveyor belt.

- Improved product flow during cooking reduces operation costs.



**LR-CP-12**

**Specification:** 12" 10~15min/pcs  
**Voltage:** 220V **Power:** 5.8kw  
**Net Weight:** 45kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 560x360x70mm  
**Dimensions:** 1500x600x430mm

**LR-CP-18**

**Specification:** 18" 10~15min/pcs  
**Voltage:** 380V **Power:** 7.7kw  
**Net Weight:** 72kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 800x520x70mm  
**Dimensions:** 2080x760x430mm



## HX Electric Conveyor Pizza Oven

### Features

- Adopt convection heating mode
- Fast heating&even temperature



**HX-1(12")**

**Specification:** 12' 10~15min/pcs  
**Voltage:** 220V **Power:** 3.7kw  
**Net Weight:** 46kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 560x385mm  
**Dimensions:** 1125/1460x580x435mm

**HX-2(18")**

**Specification:** 18" 10~15min/pcs  
**Voltage:** 380V **Power:** 10.3kw  
**Net Weight:** 86kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 800x540mm  
**Dimensions:** 1565/2140x750x1110mm



## Electric Pizza Oven



**LR-DBS-1**

**Specification:** 4(12")pcs  
**Voltage:** 380V **Power:** 4. 2kw  
**Net Weight:** 60kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 610x610x140mm  
**Dimensions:** 910x820x430mm



**LR-DBS-2**

**Specification:** 8(12")pcs  
**Voltage:** 380V **Power:** 14. 4kw  
**Net Weight:** 104kg  
**Temperature Range:** 0~400°C  
**Chamber Size:** 610x610x140mm  
**Dimensions:** 910x820x750mm



# Mini Deck Oven & Pizza Oven

## Mini Deck Oven



**EB420**

**EB520**

**EB620**

Model	Specification	Voltage (V)	Power (kw)	Temperature (°C)	Net Weight (kg)	Tray Size (mm)	Chamber Size (mm)	Dimensions (mm)
EB420	One-tray One-layer	220	3	50~300	35	390x285x40	420x340x195	666x450x440
EB520	One-tray One-layer	220	3	50~300	48	490x490x65	520x520x195	766x630x440
EB620	One-tray One-layer	220	3	50~300	55	612x413x50	620x520x195	866x630x440

## Pizza Oven

### Features

- Double temperature controller to ensure bake more quickly and evenly.
- Used high quality infrared heating tube, baking well and rise temperature fast.
- High temperature safety protector, ensure working safety.
- The temperature can be setted at will in 0°C~300°C.
- Set the lights inside and windows at the door, ensure look at the baking effect.
- The model with A use oven stone ensure to support high temperature.



**PEO-1**

**PEO-40x2**

**PEO-40x1D**



**PEO-40x1/PEO-1M**

**PEO-33x3/PEO-33x6**

**PEO-2M/PEO-40x2D**

Model	Specification	Voltage (V)	Power (kw)	Temperature (°C)	Net Weight (kg)	Chamber Size (mm)	Dimensions (mm)
PEO-1	2(12") pcs One layer	220	3.01	50~300	54	630x420x130	930x620x360
PEO-1M	2(12") pcs One layer	220	3.01	50~300	47	630x420x130	980x680x360
PEO-40x1	1(16") pcs One layer	220	4.3	50~300	43	410x420x130	710x620x360
PEO-40x2	1(16") pcs One layer	220	5.19	50~300	64	850x420x130	1130x620x360
PEO-33x3	3(12") pcs One layer	220	5.94	50~300	98	1130x420x130	1330x620x360
PEO-33x6	1(12") pcs One layer	380	10.38	50~300	100	1130x850x130	1330x1060x360
PEO-2M	2(12") pcs One layer	380	6.02	50~300	93	630x420x130	980x680x600
PEO-40x1D	1(16") pcs One layer	380	8.6	50~300	54	410x420x130	710x620x600
PEO-40x2D	1(16") pcs One layer	380	10.38	50~300	83	850x420x130	1130x620x600

# Pizza Oven & Mini Deck Oven

## Gas Pizza Oven(Temperature:0~400°C)

### PR16/PR212

**Specification:**6(12") pcs/Layer  
**Voltage:**220V  
**Power:**0.06kw/0.12kw  
**Temperature:**0~400°C  
**Net weight:**122kg/238kg  
**Chamber Size:**945x635x150mm  
**Dimensions:**1365x930x608mm  
1365x940x1710mm



PR16



PR212



## Pizza Oven

### Features

- Quick temperature rising, uniform temperature in baker and high heat efficiency.
- Base plate of hearth is made of stone and heated uniformly.
- Set timing alarm function.
- Made of high quality stainless steel plate with long span of life.
- Technology automatically adjusts the power of the fire heating elements to suit your cooking task.



PD11-A

**Specification:**1(12")pcs  
**Voltage:**220V  
**Power:**2.2kw  
**Temperature:**50~300°C  
**Net weight:**30kg  
**Chamber Size:**410x460x108mm  
**Dimensions:**610x625x300mm



PD14-A

**Specification:**4(12")pcs  
**Voltage:**220V  
**Power:**4.2kw  
**Temperature:**20~300°C  
**Net weight:**53kg  
**Chamber Size:**630x630x140mm  
**Dimensions:**870x830x390mm



PD14-H

**Specification:**4(12")pcs  
**Voltage:**220V  
**Power:**4.2kw  
**Temperature:**20~320°C  
**Net weight:**53kg  
**Chamber Size:**630x630x140mm  
**Dimensions:**870x830x390mm



## Mini Deck Oven CE



### Features

- The temperature rises evenly and quickly.
- Automatically to keep the constant temperature.
- The temperature can be set at will between ~300°C.



DL-1

**Specification:**One-tray One-stage  
**Voltage:**220V  
**Power:**3.5kw  
**Net weight:**53kg  
**Tray Size:**600x400mm  
**Chamber Size:**445x655x180mm  
**Dimensions:**785x770x430mm



DL-2

**Specification:**Two-tray Two-stage  
**Voltage:**220V  
**Power:**7kw  
**Net weight:**92kg  
**Tray Size:**600x400mm  
**Chamber Size:**445x655x180mm  
**Dimensions:**785x770x755mm



KL-2

**Specification:**Two-tray Two-stage  
Oven with Proofer  
**Voltage:**220V  
**Power:**9.5kw  
**Net weight:**147kg  
**Tray Size:**600x400mm  
**Chamber Size:**445x655x180mm  
**Dimensions:**785x770x1650mm

# Electric & Gas Oven

## LR-ES Electric Oven

### Features

- Fast heating, uniform furnace temperature, high thermal efficiency.
- The furnace bottom for slab, heated evenly.
- Temperature in the 20-400°C adjustable, points underside fire, automatic constant temperature.



Glass is optional for all



Cart is optional for two or three layers

Model	Specification	Voltage (V)	Power (kw)	Temperature Range(°C)	Net Weight (kg)	Chamber Size (mm)	Dimensions (mm)
LR-ES-12	Two-trays One-layer	220	6.6	20~400	66	870x650	1220x870x500
LR-ES-13	Three-trays One-layer	380	8	20~400	87	1290x650	1640x870x500
LR-ES-22	Two-trays Two-layers	380	8.4	20~400	66	650x450	850x640x800
LR-ES-24	Four-trays Two-layers	380	13	20~400	129	870x650	1220x870x119
LR-ES-26	Six-trays Two-layers	380	17	20~400	165	1290x650	1640x870x119
LR-ES-33	Three-trays Three-layers	380	12	20~400	100	650x450	850x640x1200
LR-ES-36	Six-trays Three-layers	380	20	20~400	178	870x650	1220x870x157
LR-ES-39	Nine-trays Three-layers	380	25	20~400	227	1290x650	1640x870x157

## LR-GS Gas Oven

- Up to safety and sanitation standard completely.
- Lower cost and save energy when completely burnt.
- New handle, luxurious appearance.



LR-GS-11  
LR-GS-12  
LR-GS-13 



LR-GS-22  
LR-GS-24  
LR-GS-26 



LR-GS-33  
LR-GS-36  
LR-GS-39 

Model	Specification	Voltage (V)	Power (kw)	Temperature Range(°C)	Net Weight (kg)	Chamber Size (mm)	Dimensions (mm)
LR-GS-11	One-tray One-layer	220	0.03	20~400	33	650x450	950x700x500
LR-GS-12	Two-trays One-layer	220	0.06	20~400	66	870x650	1340x940x670
LR-GS-13	Three-trays One-layer	220	0.1	20~400	87	1290x650	1440x940x670
LR-GS-22	Two-trays Two-layers	220	0.12	20~400	66	650x450	950x700x980
LR-GS-24	Four-trays Two-layers	220	0.12	20~400	129	870x650	1340x940x1270
LR-GS-26	Six-trays Two-layers	220	0.12	20~400	165	1290x650	1710x940x1190
LR-GS-33	Three-trays Three-layers	220	0.06	20~400	100	650x450	950x700x1460
LR-GS-36	Six-trays Three-layers	220	0.12	20~400	178	870x650	1340x940x1770
LR-GS-39	Nine-trays Three-layers	220	0.18	20~400	227	1290x650	1760x940x1770

# Oven With Proofer

## Oven With Proofer Features

- Broad glass window, arch handle, luxurious and beautiful appearance.
- Place special slate on the base of hearth, strong heat storing function and nodistortion in high temperature.
- Each layer of baker is equipped with steam generator, suitable for technological requirements to manufacture various food.
- Upper baker adopts far infrared tubular electrothermic element and control bottom fire and surface fire separately to make fire uniform.
- Fully automatic micro computer touch control, easy to operate and high control accuracy.
- Made of high quality stainless steel, heat preservation and no distortion in high temperature.



## FD Electric Oven



FD24W+XF08



FD36W



**FD24W+XF08**

**Four-tray Two-layers+8 trays**

**Power:**16.2kw

**Voltage:**380V 50Hz

**Temperature Range:**20~300 °C/20~60 °C

**Net Weight:**250kg

**Chamber Size:**870x650x220

+2x(440x880x380)mm

**Dimensions:**1255×1115×1635mm

**FD36W**

**Six-tray Three-layers**

**Power:**22.5kw

**Voltage:**380V 50Hz

**Temperature Range:**20~300 °C

**Net Weight:**385kg

**Chamber Size:**870x650x220mm

**Dimensions:**1255×1115×1735mm

## FRY Gas Oven with Proofer



FRY24-W



FRY12+XF12



FRY24+XF08



LR-ES-24+PO-8



Model	Specification	Voltage (V)	Power (kw)	Temperature Range(°C)	Net Weight (kg)	Chamber Size (mm)	Dimensions (mm)
FRY12+XF12	Two-tray One-layers+12 Trays	220	0.06+1.2	20~300 20~60	212	890x665x205	1310x960x1510
FRY24-W	Four-tray Two-layer	220	3.12	20~300	400	890x665x205	1310x1160x1600
FRY24+XF08	Four-tray Two-layers+8 Trays	220	0.12+1.2	20~300 20~60	250	890x665x205	1310x960x1810
LR-ES-24+PO-8	Four-tray Two-layers+8 Trays	380	13+2.4	20~400 20~80	180	---	1220x840x1680

# Electric Spray Proofer & Refrigerated Bread Fermentation

## Spray Proofer



**DPF-13A** 



**DPF-26A** 



**EP-30F** 



**EP-60F** 

## PWX Spray Proofer



**PWX-13/13A**



**PWX-26/26A**



**PO-16/16S**



**PO-32/32S**

## Refrigerated Bread Fermentation



**SPR-18S**

**Voltage:**220V  
**Power:**1.8kw  
**Capacity:**600L  
**Temperature:**-3~+40°C  
**Net Weight:**--kg  
**Dimensions:**625x1145x2130mm



**SPR-36S**

**Voltage:**220V  
**Power:**2.5kw  
**Capacity:**1130L  
**Temperature:**-3~+40°C  
**Net Weight:**--kg  
**Dimensions:**830x1145x2130mm

**PWX-13/PWX-13A(s/s)**  
**Specification:**13-tray Single Door  
**Voltage:**220V  
**Power:**1. 4kw  
**Temperature:**0~50°C  
**Net Weight:**48kg/50kg  
**Tray Size:**605x410x35mm  
**Chamber Size:**430x630x1295mm  
**Dimensions:**490x710x1850mm

**PWX-26/PWX-26A(s/s)**  
**Specification:**26-tray Double Door  
**Voltage:**220V  
**Power:**2. 1kw  
**Temperature:**0~50°C  
**Net Weight:**79kg/80kg  
**Tray Size:**605x410x35mm  
**Chamber Size:**925x630x1295mm  
**Dimensions:**985x710x1870mm

**PO-32/PO-32S(s/s)**  
**Specification:**32-tray Single Door  
**Voltage:**220V~240V  
**Power:**2. 5kw  
**Capacity:**120kg/h  
**Weight:**83kg/95kg  
**Dimensions:**1010x730x1985mm  
1010x800x2045mm

## YXD Rotary Rotisseries

### Features:

- With heat-proof glass can bear the temperature over 300°C.
- With a light for you to check the processing of cooking.
- The temperature will be constant and even.
- Easy to operate, safe and energy saving.



YXD-168



YXD-24E



YXD-201



YXD-306



Model	Heat Power (kw/h)	Fuel connecting specification	Temperature Range(°C)	Max. Capacity	Net Weight (kg)	Dimensions (mm)
YXD-168	7	Φ12Rubber hose	50~300	12 chickens	93	1100×750×750
YXD-24E	10.2	---	50~250	---	---	940×750×1020
YXD-201	10	---	50~300	24 chickens	179	1000×900×1000
YXD-306	2	---	—	—	106	670×550×1580

## Rotary Rotisseries



YXD-201-L



YXD-206-2



YXD-207-2 GAS



YXD-202 GAS



YXD-202-L GAS



Model	Power (kw)	Heat Power (kw/h)	Voltage (V)	Fuel connecting specification	Temperature (°C)	Max. Capacity	Net Weight (kg)	Dimensions (mm)
YXD-201-L	10+10	---	3~380	---	50~300	48 chickens	353	1000×900×2140
YXD-206-2	7+7	---	3~380	---	50~300	24 chickens	185	1340×550×1600
YXD-207-2	---	6+6	220	---	50~300	24 chickens	180	1340×550×1600
YXD-202	10	---	---	Φ12Rubber hose	50~300	24 chickens	135	1100×1000×1100
YXD-202-L	20	---	---	Φ12Rubber hose	50~300	48 chickens	277	1100×1000×2060

# Rotary Rotisseries

## GT Rotary Rotisseries



GT3-P GAS

GT3-P

**Voltage:**220V  
**Power:**0.2kw  
**Temperature:**50~300°C  
**Heat Power:**61418BTU/hr  
**Max. Capacity:**15chickens  
**Net Weight:**77kg  
**Dimensions:**1200×500×730mm



GT6-P GAS

GT6-P

**Voltage:**220V  
**Power:**0.3kw  
**Temperature:**50~300°C  
**Heat Power:**122836BTU/hr  
**Max. Capacity:**30chickens  
**Net Weight:**126kg  
**Dimensions:**1200×500×1260mm

## YXD Rotary Rotisseries



FGC-8

**FGC-8**  
220V,LPG+0.05Kw  
**Net Weight:**50Kg  
**Dimensions:**  
(1000+220)×600×1980mm

YXD-36B

**Voltage:**3-380V  
**Power:**13.7kw  
**Temperature:**50~300°C  
**Max. Capacity:**35upper grill,  
lower heat 35  
**Net Weight:**370kg  
**Dimensions:**1000×860×2080mm



YXD-36B

## VXK Rotary Rotisseries



**VXK-926**  
220V,4.5kw  
**Temperature:**0~300°C  
**Speed:**40circle/h  
**Max. Capacity:**8-12 chickens  
**Net Weight:**70kg  
**Dimensions:**800x630x650mm



**VXK-826**  
220V,6kw  
**Temperature:**0~300°C  
**Speed:**40circle/h  
**Max. Capacity:**12-16 chickens  
**Net Weight:**87kg  
**Dimensions:**1000x630x800mm



**VXK-726**  
220V,0.6kw  
**Temperature:**0~300°C  
**Speed:**40circle/h  
**Max. Capacity:**12-16 chickens  
**Net Weight:**96kg  
**Dimensions:**670x620x1380mm



**VXK-835**  
220V,7.7kw  
**Temperature:**0~300°C  
**Speed:**40circle/h  
**Max. Capacity:**12-16 chickens  
**Net Weight:**93kg  
**Dimensions:**670x650x1570mm

## Rotary Convection Oven

### Features

- Adopt the Europe-style outer design, beautiful and good-looking.
- Use the hot blast circulation to heat oven to keep the temperature rised evenly and quickly.
- The oven will keep the constant temperature automatically.
- Installed with the superhigh temperature safe protectors.
- Built-in oven lights and inspection windows, the baking operation is more convenient and reliable.

### RCO 22 trays Rotary Convection Oven



#### Mini Type:

- Air is heated via thermal tubes.
- Thus forming air circulation. The hot air is blown into the baking chamber.
- Shortening the heating period and offering.
- Uniform heating .An air regulator and a humidifier device are installed on the trolley due to the hook, the baked food is both good in color and taste economic style.

#### RCO-30

#### 22 trays

380V, 50Hz, 36kw

Temperature :0~300°C

Net Weight:1045kg

Chamber Size:

Φ1050×1600mm

Dimensions:

1400x2170x2170mm



### LJ 16 or 32 trays Rotary Convection Oven

#### Economic Type:

- Adopt the Europe-style outer design, beautiful and good looking.
- Use the hot blast circulation to heat oven to keep the temperature rised evenly and quickly.
- The oven will keep the constant temperature automatically.
- Installed with the super-high temperature safe protectors.
- Built in oven lights and inspection windows, the baking operation is more convenient and reliable.

#### 16 trays

#### Electric,Diesel,Gas are available

380V, 50Hz, 40kw/4kw(Gas,Diesel)

Temperature:0~400°C

Net Weight:1200kg

Chamber Size:740×1200×1800mm

Dimensions:1420x2370x2300mm

#### 32 trays

#### Electric,Diesel,Gas are available

380V, 50Hz, 60kw/4kw(Gas,Diesel)

Temperature:0~400°C

Net Weight:1500kg

Chamber Size:900×1370×1820mm

Dimensions:1670x2660x2300mm



# Rotary Convection Oven

## LRH 32 trays Rotary Convection Oven

### Luxury Type:

- Combustion chamber is 2.0mm, 316stainless steel,can use long time.
- Sino-Japanese joint venture burner Aolinpeiya brand change to Italy Riello brand,more beautiful and energy.
- Intelligent control system uses PLC touch screen control.



**32 trays**  
**Electric,Diesel,Gas are available**  
380V, 50Hz, 52kw/3.8kw(Gas,Diesel)  
Temperature:0~400°C  
Net Weight:1800kg  
Chamber Size:1300×1350×1830mm  
Dimensions:2620x1680x2740mm



## NFX 32 trays Rotary Convection Oven



### Standard Type:

- Providing processing service,catering customers power supplying condition oil type,gas type, and electric types.
- The burning mechanism is imported from Japan and feature complete burning, and low exhaust emission saving energy and lowering the producing cost.
- The electric parts apply imported components.
- Reasonable structure design beautiful appearance, simple and reliable.

**32 trays**  
**Electric,Diesel,Gas are available**  
380V, 50Hz, 52kw/3.8kw(Gas,Diesel)  
Temperature:0~400°C  
Net Weight:1800kg  
Chamber Size:1300×1350×1830mm  
Dimensions:2620x1680x2740mm

## ROTARY OVEN

### Product performance: 64 Pans Type:

- One time can baking 64trays.
- Luxurious appearance, reasonable structure.
- New control box using titanium frame, can be opened from the front, easy for maintenance. controll box with closed-type structure, and protection of electrical violations against pest; while increasing the cooling fan to extend the using life of electrical appliances and equipped with the safety siren, pre-ventilation, and explosion-proof equipment;
- Italian or japan imported burner, with less fuel consumption, combustion safety, low waste emission benefits; critical electrical parts imported from France, Japan, Italy.

### Product advantage:

- The door double-layer tempered glass door, outer removable cleaning, simple and convenient.
- Five-stage style tuyere, facilitate adjustment furnace temperature.
- The oven is removable structure, conveniently to transport and install.
- With the exhaust system.
- With the steam function can be baking the french baguette.



**BKX-64C**  
**Electric,Diesel,Gas are available**  
380V, 50Hz, 5. 2kw  
**Specification:**64-trays, two-cart  
**Net Weight:**2880kg  
**Max. plate:**460x720mm  
**Dimensions:**3050x2250x2450mm

# Chocolate Cooker & Bread Toaster & Cone Baker

## Chocolate Cooker:



**CC-11**  
**Power:**0.2kw  
**Voltage:**220V  
**Dimensions:**170x230x150mm



**CC-10**  
**Power:**0.4kw  
**Voltage:**220V  
**Dimensions:**350x230x150mm



**CC-2Q**  
**220V,1.5Kw**  
**Net Weight:**8Kg  
**Dimensions:**375x185x350mm



## Bread Toaster:



**MOQ:10Pcs**



**ETS-1**  
**220V,2.4Kw**  
**Fire Power:**1.3Kw  
**Thermal Power:**1.3Kw  
**Dimensions:**  
**420x420x280mm**



**ETS-4**  
**4-Piece Toaster** **CB CE**  
**Power:**1.8kw  
**Voltage:**220V  
**Net Weight:**3.9kg  
**Dimensions:**325×285×250mm



**ETS-6**  
**6-Piece Toaster** **CB CE**  
**Power:**2.5kw  
**Voltage:**220V  
**Net Weight:**5.5kg  
**Dimensions:**460×285×250mm



**DS4**  
**4-Piece Toaster** **CE**  
**Power:**2.3kw  
**Voltage:**220V  
**Temperature:**0~250°C  
**Net Weight:**5.5kg  
**Dimensions:**370×230×220mm



**DS6**  
**6-Piece Toaster** **CE**  
**Power:**3.3kw  
**Voltage:**220V  
**Temperature:**0~250°C  
**Net Weight:**7kg  
**Dimensions:**460×230×220mm



**DS8**  
**8-Piece Toaster** **CE**  
**Power:**4.3kw  
**Voltage:**220V  
**Temperature:**0~250°C  
**Net Weight:**9kg  
**Dimensions:**580×230×220mm

## Cone Baker:



**LR-CM-01**  
**Voltage:**220V, **Power:**1. 1kw  
**Temperature:**0~300°C  
**Net Weight:**7kg  
**Dimensions:**250×430×250mm



**LR-CM-02**  
**Voltage:**220V, **Power:**2. 2kw  
**Temperature:**0~300°C  
**Net Weight:**13kg  
**Dimensions:**500x430x250mm



**LR-CM-800**  
**Voltage:**220V, **Power:**0.91Kw  
**Net Weight:**10Kg  
**Temperature:**---  
**Dimensions:**225x445x170mm

# Waffle Baker

## Waffle Baker



**LR-WB-01**  
220V,1. 1kw  
**Temperature:**0~300°C  
**Net Weight:**6kg  
**Dimensions:**  
250x430x250mm



**LR-WB-02**  
220V,2. 2kw  
**Temperature:**0~300°C  
**Net Weight:**12kg  
**Dimensions:**  
500x430x250mm



**LR-WBL-01**  
220V,1. 1kw  
**Temperature:**0~300°C  
**Net Weight:**8kg  
**Dimensions:**  
250x430x250mm



**LR-WBL-02**  
220V,2. 2kw  
**Temperature:**0~300°C  
**Net Weight:**16kg  
**Dimensions:**  
500x430x250mm



**LR-WBX-01**  
220V,1. 1kw  
**Temperature:**0~300°C  
**Net Weight:**8kg  
**Dimensions:**250x430x290mm



**LR-WBX-02**  
220V,2. 2kw  
**Temperature:**0~300°C  
**Net Weight:**16kg  
**Dimensions:**510x430x290mm



**LR-WBH-01**  
**Power:**0.9kw  
**Voltage:**220V  
**Dimensions:**  
325x250x250mm



**LR-WBH-02**  
**Power:**1.8kw  
**Voltage:**220V  
**Dimensions:**  
325x250x250mm



**LR-WBF-01**  
220V,0.9kw  
**Temperature:**  
0~300°C  
**Net Weight:**10kg  
**Dimensions:**  
430x260x290mm



**LR-WBF-02**  
220V,2. 2kw  
**Temperature:**  
0~300°C  
**Net Weight:**17.5kg  
**Dimensions:**  
430x520x290mm



**LR-WBFX-02**  
220V,2. 2kw  
**Temperature:**  
0~300°C  
**Net Weight:**18kg  
**Dimensions:**  
430x520x290mm



## Dount Machine



**LR-WB-801W**  
220V,1.4Kw  
Net Weight:20Kg  
Temperature:--  
Dimensions:305x440x250mm



**T-5**  
220V,1.5Kw  
Net Weight:8Kg  
Dimensions:355x310x235mm

**T-6**  
220V,1.5Kw  
Net Weight:9Kg  
Dimensions:405x310x235mm

# Coffee Grinder & Distillation Coffe Machine

## Coffee Grinder

### Features:

- New design, elegant appearance.
- Power motor,high effeciency.
- Use PC material.



**HC600**

Color: Black



**HC600**

Color: Red



**HC600**

Color: Grey



**DJ6220**

**DJ6220**

**Power:0.18kw**

**Voltage:220V**

**Net weight:9.5kg**

**Dimensions:250x170x415mm**



## Distillation Coffee Machine



**DW-17**

**Power:0.15kw**

**Voltage:220V**

**Net weight:6.5kg**

**Dimensions:205x385x450mm**



**DW-2R**

**Power:2.47kw**

**Voltage:220V**

**Net weight:5.5kg**

**Dimensions:205x385x445mm**



**DW-2**

**Power:2.6kw**

**Voltage:220V**

**Net weight:12kg**

**Dimensions:438x203x483mm**



**DW-3**

**Power:2.7kw**

**Voltage:220V**

**Net weight:16kg**

**Dimensions:438x406x483mm**

# Coffee Machine

## Fully Automatic Coffee Machine

### Features:

- Two boilers separately for steam making and coffee making
- Grind coffee bean instantly and completely automatically
- Brew aromatic coffee just by pushing a small button
- Easy to operate with LCD display guide
- Hot water and steam ready for use whenever necessary
- Cup pre-warming function
- Removable Water Tank and Drip Tray
- Italian 20 bar Invensys pump

CE, EMC, ROHS & GS certificates are available.



Color: Black



ME-707

220V, 50Hz, 1.25kw  
Output: 90cup/h  
Water Box: 1.8L  
Bean box: 250g  
Net Weight: 15kg  
Dimensions:  
410x338x355mm  
MOQ: 50pcs



## Fully Automatic Espresso Cappuccino Coffee Machine

### With Milk Frother



ME-708

220V, 50Hz 1.25kw  
Output: 90cup/h  
Water Box: 1.8L  
Bean box: 250g  
Net Weight: 15kg  
Dimensions: 438x452x465mm  
MOQ: 50pcs



Color: Black



ME-709

220V, 50Hz 1.25kw  
Output: 90cup/h  
Water Box: 1.8L  
Bean box: 250g  
Net Weight: 15kg  
Dimensions: 438x452x465mm  
MOQ: 50pcs

## Fully Automatic Coffee Machine



MKF-03C

220V, 50Hz, 0.97kw, Output: 90cup/h  
Water Box: 3L, Bean Box: 400g  
Net Weight: 12kg  
Dimensions: 383x336x575mm

## Semi-Automatic Coffee Maker



DZ-1

Power: 2kw  
Voltage: 220V  
Volume: 6L  
Net Weight: 47kg  
Dimensions: 460x490x450mm



DZ-2

Power: 3.7kw  
Voltage: 220V  
Volume: 10.6L  
Net Weight: 67kg  
Dimensions: 700x490x450mm



DZ-3

Power: 4.5kw  
Voltage: 220V  
Volume: 15L  
Net Weight: 68kg  
Dimensions: 960x530x510mm

# Hot Dog Machine

## LR-HD Hot Dog Machine

### Features

- Stainless steel or Teflon Rollers – durable & easy to clean.
- Heavy duty motor - drives the rollers.
- Excellent performance and easy control.



**LR-HD-5**   
220V,50Hz,0.5kw  
Temperature:0~200°C  
Net Weight:6.5kg  
Dimensions:440×250×175mm



**LR-HD-7**   
220V,50Hz,0.7kw  
Temperature:0~200°C  
Net Weight:7.8kg  
Dimensions:442×325×175mm



**LR-HD-9**   
220V,50Hz,0.9kw  
Temperature:0~200°C  
Net Weight:11kg  
Dimensions:553×402×175mm



**LR-HD-11**   
220V,50Hz,1.1kw  
Temperature:0~200°C  
Net Weight:13.5kg  
Dimensions:553×475×175mm



**LR-HD-5S**   
220V,50Hz,0.17kw  
Temperature:0~100°C  
Net Weight:7kg  
Dimensions:438×284×175mm



**LR-HD-7S**   
220V,50Hz,0.23kw  
Temperature:0~100°C  
Net Weight:8.4kg  
Dimensions:438×360×175mm



**LR-HD-9S**   
220V,50Hz,0.29kw  
Temperature:0~100°C  
Net Weight:11.5kg  
Dimensions:548×435×175mm



**LR-HD-11S**   
220V,50Hz,0.35kw  
Temperature:0~100°C  
Net Weight:13.2kg  
Dimensions:553×512×175mm



**LR-HD-7X**   
220V,50Hz,0.7kw  
Temperature:0~200°C  
Net Weight:7.8kg  
Dimensions:443×325×205mm



**LR-HD-9X**   
220V,50Hz,0.9kw  
Temperature:0~200°C  
Net Weight:10.5kg  
Dimensions:553×402×215mm



**LR-HD-11X**   
220V,50Hz,1.1kw  
Temperature:0~200°C  
Net Weight:15kg  
Dimensions:553×475×221mm



Used organic glass structure,  
beautiful design and luxurious,  
clean and hygiene,many kinds  
of hot dog warmer you can select.  
**LR-HD-11XS**  
220V, 50Hz,1. 5kw  
Temperature:0~200°C  
Net Weight:20kg  
Dimensions:553×480×205mm

## Hot Dog Grill & Bun Warmer



**LR-HD-9C**  
220V,50Hz,1.2kw  
Temperature:0~200°C  
Warming Temperature:0~80°C  
Capacity : 1/2x4" x1  
Net Weight:25kg  
Dimensions:460×515×385mm



**LR-HD-11C**  
220V,50Hz,1.55kw  
Temperature:0~200°C  
Warming Temperature:0~80°C  
Capacity : 1/1x4" x1  
Net Weight:30kg  
Dimensions:660×575×385mm

Note:Design and specification are subject to change without notice

# Hot Dog Machine & Hot Dog Steamer

## WY Hot Dog Machine



**WY-007C** **CE**

220V,50Hz,1. 33kw  
Temperature:0~250°C  
Net Weight:11. 5kg  
Dimensions:590×330×420mm



**WY-009C** **CE**

220V, 50Hz, 1. 69kw  
Temperature:0~250°C  
Net Weight:14kg  
Dimensions:590×400×420mm



**WY-007D** **CE**

220V,50Hz,1. 33kw  
Temperature:0~250°C  
Net Weight:11. 5kg  
Dimensions:590×330×420mm



**WY-009D** **CE**

220V,50Hz,1. 69kw  
Temperature:0~250°C  
Net Weight:14kg  
Dimensions:590×400×420mm



**WY-005** **CE**

220V,50Hz,0. 96kw  
Temperature:0~250°C  
Net Weight:9kg  
Dimensions:590×250×420mm



**WY-007** **CE**

220V,50Hz,1. 33kw  
Temperature:0~250°C  
Net Weight:11. 5kg  
Dimensions:590×330×420mm



**WY-009** **CE**

220V,50Hz,1. 69kw  
Temperature:0~250°C  
Net Weight:14kg  
Dimensions:590×400×420mm



**WY-011** **CE**

220V,50Hz,2. 06kw  
Temperature:0~250°C  
Net Weight:16. 5kg  
Dimensions:590×480×420mm

## Hot Dog Machine



**HDD-1**

220V,50Hz,0. 6kw  
Temperature:0~80°C  
Net Weight:9.7kg  
Dimensions:580×360×460mm



**HDD-3**

220V,50Hz,1.1Kw  
Net Weight:8.5Kg  
Dimensions:465x330x390mm



**HDD-2**

220V,50Hz,0. 8kw  
Temperature:0~80°C  
Net Weight:5.9kg  
Dimensions:360×360×460mm

## Bun Warmer



**EB-32W**

220V,50Hz,0.45kw  
Temperature:0~80°C  
Capacity: 32Buns  
Net Weight:21kg  
Dimensions:590×540×290mm

## Combination Hot Dog Steamer & Bun Warmer



**HW-4G MOQ:10pcs**

220V,50Hz,1kw  
Temperature:0~80°C  
Net Weight:10kg  
Dimensions:430×420×400mm

## Electric lift-up Salamander

### Features:

- Make sure of its high efficient heat energy downward can make special roast effect on the surface of food. And it has an ideal result of heating and cooking for dishes with crumbs or cheese.
- Its handle can adjust the distance of the food and heat source on demand while roasting.
- It is made of stainless steel and the drop plate can be pull out and be easy to be cleaned.



**LR-OT-936**  
220V,50Hz,2. 2kw  
Net Weight: 17kg  
Dimensions:  
570x340x206mm



**LR-OT-600**  
220V,50Hz,4kw  
Net Weight: 49kg  
Dimensions:  
600x520x500mm



**LR-ES-450**  
220V,4Kw  
Net Weight:46Kg  
Dimensions:  
600x450x500mm

**LR-ES-600**  
220V,5.6Kw  
Net Weight:51Kg  
Dimensions:  
800x450x500mm



**EB-450 EB-600 EB-800**  
220V,50Hz, 2. 8/4kw/5.6kw  
Temperature:50~300°C  
Net Weight: 38.5/49/6kg  
Dimensions:  
450x450x500mm  
600x450x500mm  
800x450x500mm



## Electric Salamander



**LR-ES-1**  
220V,50Hz,2kw  
Temperature:0~200°C  
Net Weight: 16kg  
Chamber size: 240x350x180mm  
Dimensions: 500×290×250mm



**LR-ES-2**  
220V,50Hz,3kw  
Temperature:0~200°C  
Net Weight: 23kg  
Chamber size: 240x350x320mm  
Dimensions: 500×290×380mm



**LR-ES-3**  
220V,50Hz,4kw  
Temperature:0~250°C  
Net Weight: 28. 5kg  
Chamber size: 630x400x340mm  
Dimensions: 800×450×470mm



## Electric or Gas Salamander



**ES-936**  
220V, 50Hz, 2. 2kw  
Temperature:0~300°C  
Net Weight: 13kg  
Chamber size: 430x305x180mm  
Dimensions: 600×420×310mm



**ES-927**  
220V, 50Hz, 4. 6kw  
Temperature:0~300°C  
Net Weight: 24. 5kg  
Chamber size: 640x413x360mm  
Dimensions: 840×510×530mm



**GS-14**  
Heating: 29MJ  
Power: 27, 700BTU/h  
Tube Dia: 12mm  
Net Weight: 42kg  
Chamber size: 440x384x291mm  
Dimensions: 620×520×590mm



**GS-16**  
Heating: 44MJ  
Power: 42, 000BTU/h  
Tube Dia: 12mm  
Net Weight: 53.5kg  
Chamber size: 640x384x291mm  
Dimensions: 820×520×590mm



# Kebab Slicer & Kebab Machine

## Kebab Slicer

**EMS-80**

220V, 50Hz, 0.1kw  
Knife size:Dia 100mm  
Net Weight:1.22kg  
Output:60kgs/24h  
Dimensions:110x150x260mm



## Mini Kebab Machine



**GB-22**

220V, 1.5kw  
Net Weight:17kg  
Dimensions:  
118.5x350x340mm

**GB-25**

220V, 2kw  
Net Weight:8.5kg  
Dimensions:  
295x265x480mm

**GB-220**

220V, 3kw  
Net Weight:6.5kg  
Dimensions:  
290x240x450mm

## Kebab Machine

### Features :

- Easy to control, it is quite easy to hang or removed the food.
- Quite easy to clear with a pan to pick the oil.
- High efficiency and low energy waste.
- Quite quick to bake the food with 6~9 min.



**GB-800**

Power:30708BTU/h  
Rotate speed:5 r/min  
Net Weight:23kg  
Dimensions:580x630x800mm



**GB-950**

Power:51180BTU/h  
Rotate speed:5 r/min  
Net Weight:23kg  
Dimensions:580x650x950mm



**LR-GB-798**

Power:170590BTU/h  
Rotate Speed:2.5r/min  
Net Weight:30.5kg  
Dimensions:540x700x1300mm



**EB-960**

Voltage:220V  
Power:16kw  
Net Weight:27kg  
Dimensions:580x650x1150mm



**EB-850**



**LR-EB-890**



**LR-EB-898**

**EB-850**

220V,50Hz,9/6kw  
Rotate Speed:2. 5r/min  
Temperature:50~300°C  
Net Weight:26kg  
Dimensions:580×650×950mm



**LR-EB-890 LR-EB-898**

220V,50Hz,5/5. 5kw  
Rotate Speed:2.5r/min  
Temperature : 0~300°C  
Net Weight:32kg/47kg  
Dimensions:510×520×920mm  
520×530×920mm

# Contact Grill & Sandwich Machine

## LR-CG Contact Grill



**LR-CG-2**

**Power:** 3kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 16.5kg  
**Dimensions:** 520x370x200mm

## Sandwich Machine



**LR-CG-350**

**Power:** 3kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 17kg  
**Dimensions:** 254x475x380mm



## LR-FG Contact Grill (Luxurious)

**Fast Warming up to 300°C in 5 min**

**MOQ:** 10pcs

### Features:

- 
- 
- 
- 



**LR-FG-1**

**Power:** 1.6kw  
**Voltage:** 220V  
**Glass Size:** 250x250mm  
**Temperature:** 50~300°C  
**Net Weight:** 10.5kg  
**Dimensions:** 340x480x170mm



**LR-FG-1L**

**Power:** 2.9kw  
**Voltage:** 220V  
**Glass Size:** 400x300mm  
**Temperature:** 50~300°C  
**Net Weight:** 17.2kg  
**Dimensions:** 590x550x170mm



**LR-FG-2**

**Power:** 3.2kw  
**Voltage:** 220V  
**Glass Size:** 250x250mm  
**Temperature:** 50~300°C  
**Net Weight:** 21kg  
**Dimensions:** 700x480x170mm

## LR Contact Grill

**Fast Warming up to 300°C in 15 min**



**LR-811**

**Power:** 1.8kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 14.5kg  
**Dimensions:** 370x305x185mm



**LR-811E**

**Power:** 2.2kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 20kg  
**Dimensions:** 460x370x190mm



**LR-813**

**Power:** 1.8x2kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 28kg  
**Dimensions:** 565x370x190mm



**LR-813B**

**Power:** 1.8x2kw  
**Voltage:** 220V  
**Temperature:** 50~300°C  
**Net Weight:** 28kg  
**Dimensions:** 565x370x190mm

# Electric Grill/Griddle

## Electric Grill/Griddle

### Features

- The machine will shut off automatically when reach to the setting temperature, which is more safe.
- Easy to clean with a oil pan.
- Thermostatic control ensures accurate temperature control & consistently perfect results.



**LR-EG-538T** MOQ: 50Pcs  
Voltage: 220V, Power: 3kw  
Net Weight: 19.5kg  
Temperature: 50~300°C  
Area of Hot Plate: 497×336mm  
Thickness of Hot Plate: 8mm  
Dimensions: 500×480×220mm



**LR-EG-548**  
**EG548-1**  
**LR-EG-548-2**  
Voltage: 220V, Power: 3kw  
Net Weight: 25kg  
Temperature: 50~300°C  
Area of Hot Plate: 497×336mm  
Thickness of Hot Plate: 8mm  
Dimensions: 555×473×293mm



**LR-EG-618**  
**LR-EG-618-2**  
Voltage: 220V, Power: 6kw  
Net Weight: 40kg  
Temperature: 50~300°C  
Area of Hot Plate: 610×511mm  
Thickness of Hot Plate: 8mm  
Dimensions: 620×613×325mm



**LR-EG-738**  
**LR-EG-738-2**  
Voltage: 220V, Power: 4.4kw  
Net Weight: 37kg  
Temperature: 50~300°C  
Area of Hot Plate: 732×415mm  
Thickness of Hot Plate: 8mm  
Dimensions: 735x524x293mm

## Mini Electric Grill



**LR-EG-420**  
Voltage: 220V, Power: 1.8kw  
Net Weight: 18.5kg  
Temperature: 50~300°C  
Area of Hot Plate: 336×350mm  
Thickness of Hot Plate: 12mm  
Dimensions: 340×420×250mm

### LR-EG-300

Voltage: 220V, Power: 1.5kw  
Net Weight: 14kg  
Temperature: 50~300°C  
Area of Hot Plate: 294×292mm  
Thickness of Hot Plate: 12mm  
Dimensions: 300×360×250mm



**LR-EG-410**  
Voltage: 220V, Power: 2kw  
Net Weight: 27.5kg  
Temperature: 50~300°C  
Area of Hot Plate: 410×425mm  
Thickness of Hot Plate: 12mm  
Dimensions: 415×520×253mm



**LR-EG-610**  
Voltage: 220V, Power: 3.2kw  
Net Weight: 40kg  
Temperature: 50~300°C  
Area of Hot Plate: 610×425mm  
Thickness of Hot Plate: 12mm  
Dimensions: 610×520×253mm

## Electric Grill/Griddle



**LR-EG-530**  
**LR-EG-530-2**  
Voltage: 220V, Power: 3kw  
Net Weight: 34kg  
Temperature: 50~300°C  
Area of Hot Plate: 527×422mm  
Thickness of Hot Plate: 8mm  
Dimensions: 530×600×475mm



**LR-EG-600**  
**LR-EG-600-2**  
Voltage: 220V, Power: 4.4kw  
Net Weight: 39kg  
Temperature: 50~300°C  
Area of Hot Plate: 597×422mm  
Thickness of Hot Plate: 8mm  
Dimensions: 600×600×475mm



**LR-EG-750**  
**LR-EG-750-2**  
Voltage: 220V, Power: 6kw  
Net Weight: 46kg  
Temperature: 50~300°C  
Area of Hot Plate: 747×422mm  
Thickness of Hot Plate: 8mm  
Dimensions: 750×600×475mm

# Electric & Gas Grill/Griddle & Donut Machine

## Electric Grill/Griddle

### Features

- The machine will shut off automatically when reach to the setting temperature, which is more safe.
- Easy to clean with a oil pan.
- Thermostatic control ensures accurate temperature control & consistently perfect results.



**LR-GR-280**

**Voltage:** 220V  
**Power:** 1.8kw  
**Net Weight:** 10. 3kg  
**Dimensions:** 280X380X230mm



**LR-GR-360**

**Voltage:** 220V  
**Power:** 2kw  
**Net Weight:** 19. 5kg  
**Dimensions:** 360X450X250mm



**LR-GR-410**

**Voltage:** 220V  
**Power:** 2. 5kw  
**Net Weight:** 29kg  
**Dimensions:** 415X500X255mm



## LR-GA Gas Grill&Griddle



**LR-GA-718**

**Power:** 29MJ  
**Tube Dia:** 12mm  
**Gas Pressure:** 2800Pa  
**Gas Class:** LPG,Natural Gas, Coal Gas  
**Thickness of Hot Plate:** 8mm  
**Area of Hot Plate:** 548x350mm  
**Net Weight:** 32kg  
**Dimensions:** 610×560×400mm



**LR-GA-720**

**Power:** 44MJ  
**Tube Dia:** 12mm  
**Gas Pressure:** 2800Pa  
**Gas Class:** LPG, Natural Gas, Coal Gas  
**Thickness of Hot Plate:** 8mm  
**Area of Hot Plate:** 728x400mm  
**Net Weight:** 38kg  
**Dimensions:** 790×590×400mm



**LR-GA-721**

**Power:** 29MJ  
**Tube Dia:** 12mm  
**Gas Pressure:** 2800Pa  
**Gas Class:** LPG, Natural Gas, Coal Gas  
**Thickness of Hot Plate:** 8mm  
**Area of Hot Plate:** 548x350mm  
**Net Weight:** 32kg  
**Dimensions:** 610×560×400mm



**LR-GA-722**

**Power:** 44MJ  
**Tube Dia:** 12mm  
**Gas Pressure:** 2800Pa  
**Gas Class:** LPG, Natural Gas, Coal Gas  
**Thickness of Hot Plate:** 8mm  
**Area of Hot Plate:** 728x400mm  
**Net Weight:** 38kg  
**Dimensions:** 790×590×400mm

## Donut Machine



- Made of stainless steel,high quality.
- The inside size of Diamter of donut can be adjustable.
- Have two parts controller for making donut and boiling oil.
- With high temperature protect.
- The chain is made of stainless steel.

**T-100**

**Power:** 6kw  
**Voltage:** 220/380V  
**Capacity:** 30L  
**Temperature:** 50~300°C  
**Net Weight:** 45kg  
**Outside Diameter of Donut :** 50mm  
**Inside Diameter of Donut :** 20/30/40mm  
**Dimensions:** 1100x550x650mm



Mode for 40 mm inside diameter of donut



Mode for 30 mm inside diameter of donut



Mode for 20 mm inside diameter of donut

# Electric Fryer

## LR-EF Electric Fryer



CE



CE



CE



CE

**LR-EF-061**

**Power:** 2kw  
**Voltage:** 220V  
**Capacity:** 6L  
**Temperature:** 60~200°C  
**Net Weight:** 4.5kg  
**Dimensions:** 190x440x270mm

**LR-EF-062**

**Power:** 2x2kw  
**Voltage:** 220V  
**Capacity:** 6x2L  
**Temperature:** 60~200°C  
**Net Weight:** 7kg  
**Dimensions:** 380x440x270mm

**LR-EF-101B**

**Power:** 3kw  
**Voltage:** 220V  
**Capacity:** 10L  
**Temperature:** 60~250°C  
**Net Weight:** 7kg  
**Dimensions:** 280x465x310mm

**LR-EF-102B**

**Power:** 3+3kw  
**Voltage:** 220V  
**Capacity:** 10x2L  
**Temperature:** 60~250°C  
**Net Weight:** 12kg  
**Dimensions:** 575x465x310mm

## LR-EF Electric Fryer(With Timer)



CE

**LR-EF-101**  
**LR-EF-171**

**Power:** 3kw/5kw  
**Voltage:** 220V  
**Capacity:** 10L/17L  
**Temperature:** 60~200°C  
**Net Weight:** 6kg/8kg  
**Dimensions:** 290x440x285mm  
293x500x330mm



CE

**LR-EF-102**  
**LR-EF-172**

**Power:** 3x2kw/5x2kw  
**Voltage:** 220V  
**Capacity:** 10x2L/17x2L  
**Temperature:** 60~200°C  
**Net Weight:** 9.5kg/15.5kg  
**Dimensions:** 590x440x285mm  
595x500x330mm

## LR-EF-V Electric Fryer(With Oil Leakage)



CE



CE

**LR-EF-171V**

**Power:** 5kw  
**Voltage:** 220V  
**Capacity:** 17L  
**Temperature:** 60~200°C  
**Net Weight:** 9kg  
**Dimensions:** 370x605x420mm



CE



CE

**LR-EF-172V**

**Power:** 5x2kw  
**Voltage:** 220V  
**Capacity:** 17x2L  
**Temperature:** 60~200°C  
**Net Weight:** 16.5kg  
**Dimensions:** 680x605x420mm

# Gas & Electric Fryer

## Giant-Size Electric Fryer (USA Style)

### Features:

- Designed with safety, durability & simplicity in mind.
- Heating element protection grid.
- Easy cleaning.

- Safety cut off to power supply.
- High limit thermostat for added safety
- Easy oil draining.



**LR-GF-171**  
**Gas Pressure:** 2800Pa  
**Power:** 20.8MJ/h  
**Capacity:** 17x1L  
**Net Weight:** 22kg  
**Temperature:** 60~200°C  
**Dimensions:** 340×615×630mm



**LR-GF-172**  
**Gas Pressure:** 2800Pa  
**Power:** 41.6MJ/h  
**Capacity:** 17x2L  
**Net Weight:** 38kg  
**Temperature:** 60~200°C  
**Dimensions:** 680×615×630mm

LR-GF-171

LR-GF-172



LR-EF7.5-1H



LR-EF7.5-2H



LR-EF10-1H



LR-EF10-2H



LR-EF16-1H



LR-EF16-2H



LR-EF20-1H



LR-EF20-2H

Model	Power (kw)	Voltage (V)	Capacity (L)	Temperature (°C)	Net Weight (kg)	Dimensions (mm)
LR-EF7.5-1H	5	220	7.5	60~200	15	363×635×530
LR-EF7.5-2H	5x2	220	7.5x2	60~200	27	724×635×530
LR-EF10-1H	7.5	220	10	60~200	16	363×635×560
LR-EF10-2H	7.5x2	220	10x2	60~200	29	724×635×560
LR-EF16-1H	11.7	380	16	60~200	21	438×800×560
LR-EF16-2H	11.7x2	380	16x2	60~200	39	892×800×560
LR-EF20-1H	13.8	380	20	60~200	23	438×800×590
LR-EF20-2H	13.8x2	380	20x2	60~200	43	892×800×590

# Standing Electric & Gas Fryer&Pressure Fryer

## Standing Gas Fryer



**LR-GF46-1**  
Gas Pressure: 2800Pa  
Power: 240.4MJ/h  
Capacity: 46x1L  
Net Weight: 48kg  
Temperature: 60~200°C  
Dimensions: 450×700×980mm

**LR-GF46-2**  
Gas Pressure: 2800Pa  
Power: 240.4MJ/h  
Capacity: 46x2L  
Net Weight: 83kg  
Temperature: 60~200°C  
Dimensions: 870×700×980mm

## Pressure Fryer



**MDXZ-24**  
Power: 12kw  
Capacity: 24L  
Net Weight: 111kg  
Dimension:  
958×560×1150mm

**MDXZ-25**  
Power: 3kw  
Capacity: 15L  
Net Weight: 18kg  
Dimension:  
350×400×500mm

## Standing Electric Fryer



**LR-EF36-1**  
Voltage: 3~380V  
Power: 13.8kw  
Capacity: 36L  
Net Weight: 33kg  
Temperature: 60~200°C  
Dimensions:  
440x800x950mm

**LR-EF36-2**  
Voltage: 3~380V  
Power: 13.8x2kw  
Capacity: 36x2L  
Net Weight: 60kg  
Temperature: 60~200°C  
Dimensions:  
890x800x950mm



**LR-EF48-1**  
Voltage: 3~380V  
Power: 9kw  
Capacity: 48L  
Net Weight: 32.5kg  
Temperature: 60~200°C  
Dimensions:  
450x685x1020mm

**LR-EF48-2**  
Voltage: 3~380V  
Power: 9x2kw  
Capacity: 48x2L  
Net Weight: 56kg  
Temperature: 60~200°C  
Dimensions:  
870x685x1020mm

## Electric Fryer



**LR-28L-2**  
Power: 18+18kw  
Capacity: 28Lx2  
Net Weight: 100kg  
Dimension: 800x800x1100mm



**LR-14L-2**  
Power: 9+9kw  
Capacity: 14Lx2  
Net Weight: 60kg  
Dimension: 400x800x1100mm



**LR-28L**  
Power: 18kw  
Capacity: 28L  
Net Weight: 60kg  
Dimension: 400x800x1100mm



**LR-965**  
Power: 12kw  
Capacity: 14L  
Net Weight: 35kg  
Dimension: 400x900x970mm

# Popcorn Machine

## Popcorn Machine

- High-output, stainless popping pot provides optimum performance and easy cleaning.
- Four sides with toughened glass safety as easy cleaning.

- Presentation lamp lights the cabinet interior and highlights the popped corn for added impulse sales.
- Sturdy cabinet and trolley construction .

## Popcorn Maker with Trolley



**EPT-8B**  
Voltage:220V  
Power:0.86kw  
Boiler Temperature:230°C  
Bottom temperature:45~65°C  
Net Weight: 19+15kg  
Dimensions: 525×445×1520mm



**EP-8F**  
Voltage:220V  
Power:0.86kw  
Boiler Temperature:230°C  
Bottom temperature:0~65°C  
Net Weight: 19kg  
Dimensions: 525×445×650mm



**EP-8R**  
Voltage:220V  
Power:0.86kw  
Boiler Temperature:230°C  
Bottom temperature:45~65°C  
Net Weight: 19kg  
Dimensions: 525×445×650mm



**EPT-8R**  
Voltage:220V  
Power:0.86kw  
Boiler Temperature:230°C  
Bottom temperature:45~65°C  
Net Weight: 19+15kg  
Dimensions: 525×445×1520mm



**EP-8B**  
Voltage:220V  
Power:0.86kw  
Boiler Temperature:230°C  
Bottom temperature:45~65°C  
Net Weight: 19kg  
Dimensions: 525×445×650mm



# Popcorn Machine

## Popcorn Machine



LR-PM8-801

LR-PM8-802

LR-PM8-803  
LR-PM16-78

LR-PM8-817  
LR-PM16-98

LR-PM8-818  
LR-PM16-88

Model	Power (kw)	Voltage (V)	Boiler Temperature (°C)	Bottom Temperature (°C)	Net Weight (kg)	Dimensions (mm)
LR-PM8-801	1.43	220	0~245	0~65	23	500×360×660
LR-PM8-802	1.43	220	0~245	0~65	20	580×420×740
LR-PM8-818	1.43	220	0~245	0~65	24.5	590×450×780
LR-PM16-88	2.3	220	0~245	0~65	56	800×600×1100
LR-PM8-803	1.43	220	0~245	0~65	23	580×420×740
LR-PM16-78	2.3	220	0~245	0~65	56	800×600×1100
LR-PM8-817	1.4	220	0~245	0~65	23	500×420×740
LR-PM16-98	2.3	220	0~245	0~65	56	800×600×1100

## Cart For Popcorn Machine



LR-PC8-300

Net Weight: 15kg  
Dimensions:  
696×364×847mm



LR-PC8-600

Net Weight: 20kg  
Dimensions:  
1000×530×760mm



LR-PC8-626

Net Weight: 20kg  
Dimensions:  
1000×530×760mm



LR-PC16-608

Net Weight: 47kg  
Dimensions:  
1850×800×2100mm

# Popcorn Machine & Cotton Candy Machine

## Cotton Candy Machine



**WY-78**

Power: 5500BTU/h  
Net Weight: 16kg  
Dimensions: 500×500×530mm




**WY-771**

Power: 1.2kw  
Voltage: 220V  
Net Weight: 16kg  
Dimensions: 500×500×530mm



**WY-200**

Power: 5500BTU/h  
Net Weight: 11kg  
Dimensions: 710×540×1060mm



## Popcorn Machine



**EB-10**

Power: 1.5kw  
Voltage: 220V  
Boiler Temperature: 230°C  
Bottom temperature: 0~65°C  
Net Weight: 19.8kg  
Dimensions: 520×365×770mm



**LR-PM8-81**

Power: 1.3kw  
Voltage: 220V  
Boiler Temperature: 245°C  
Bottom temperature: 65°C  
Net Weight: 16kg  
Dimensions: 500×360×610mm



**LR-PM8-82**

Power: 1.3kw  
Voltage: 220V  
Boiler Temperature: 245°C  
Bottom temperature: 65°C  
Net Weight: 21kg  
Dimensions: 560×420×680mm



**LR-PW-909**

Power: 0.78kw  
Voltage: 220V  
Temperature: 0~85°C  
Net Weight: 15kg  
Dimensions: 580×420×740mm

## Popcorn Maker With Showcase



**LR-PM8-898 Red**  
**LR-PM8-8800 Black**

**LR-PM8-898**

**LR-PM8-8800**  
Power: 2kw  
Voltage: 220V  
Boiler Temperature: 245°C  
Bottom temperature: 65°C  
Warming Temperature: 85°C  
Net Weight: 38kg  
Dimensions: 900×420×740mm

**LR-PM16-918**

**LR-PM16-919**  
Power: 3.5kw  
Voltage: 220V  
Boiler Temperature: 245°C  
Bottom temperature: 65°C  
Warming Temperature: 85°C  
Net Weight: 90kg  
Dimensions: 1290×600×1100mm



**LR-PM16-918 Black**  
**LR-PM16-919 Red**

# Gas Stove

## Standing Style Gas Stove



**BV-33**

**Power:**75064BTU/h  
**Net Weight:**45kg  
**Dimensions:**700×700×900mm



**BV-34**

**Power:**112596BTU/h  
**Net Weight:**65kg  
**Dimensions:**1100×700×900mm



**BV-35**

**Power:**153540BTU/h  
**Net Weight:**85kg  
**Dimensions:**1400×700×900mm



**BV-41**

**Power:**112596BTU/h  
**Net Weight:**60kg  
**Dimensions:**800×750×950mm

## RB Cantonese Clay Pot Stove



**LR-RB-4**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**116MJ/h  
**Net Weight:**45kg  
**Dimensions:**842×877×410mm



**LR-RB-6**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**174MJ/h  
**Net Weight:**60kg  
**Dimensions:**1213x877x410mm



**LR-RB-8**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**232MJ/h  
**Net Weight:**76kg  
**Dimensions:**1584x877x410mm



**LR-RB-4W**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**116MJ/h  
**Net Weight:**49kg  
**Dimensions:**842×877×830mm



**LR-RB-6W**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**174MJ/h  
**Net Weight:**66kg  
**Dimensions:**1213x877x830mm



**LR-RB-8W**

**Gas Class:**LPG GAS  
**Gas Pressure:**2800Pa  
**Heat Load:**232MJ/h  
**Net Weight:**84kg  
**Dimensions:**1584x877x830mm

# Food Warmer

## Food Display Steamer



**MME-500H**

**Power:** 0.9kw  
**Voltage:** 220V  
**Net Weight:** 22kg  
**Dimensions:** 380x400x745mm



**MME-600H**

**Power:** 0.9kw  
**Voltage:** 220V  
**Net Weight:** 23kg  
**Dimensions:** 457x518x825mm

## Pizza Warmer



**DH-13**

**220V, 50Hz, 0.9kw**  
**Net Weight:** 27kg  
**Temperature:** 40~80°C  
**Dimensions:** 550x450x770mm



**HP-1**

**220V, 50Hz, 1.68kw**  
**Net Weight:** 37kg  
**Temperature:** 30~85°C  
**Dimensions:** 570x570x700mm

## Food Warmer



**DH-14**

**220V, 50Hz, 0.88kw**  
**Net Weight:** 27kg  
**Temperature:** 40~80°C  
**Dimensions:** 550x450x770mm



**FW-4**

**Power:** 0.85kw  
**Voltage:** 220V  
**Net Weight:** 16kg  
**Temperature:** 40~80°C  
**Dimensions:** 350x425x500mm



**FW-3**

**Power:** 1.2kw  
**Voltage:** 220V  
**Net Weight:** 28kg  
**Temperature:** 40~80°C  
**Dimensions:** 660x500x620mm



**FW-1/FW-2**

**Power:** 1/1.5kw  
**Voltage:** 220V  
**Net Weight:** 21/35kg  
**Temperature:** 40~80°C  
**Dimensions:** 640x360x530mm  
865x360x625mm

## Food Warmer



**R98FC/R128FC/R168FC**



**DH-60/DH-80**



**HC-2**

Model	Voltage (V)	Power (kw)	Capacity (L)	Temperature Range(°C)	Net Weight (kg)	Dimensions (mm)
R98FC	220	0.47	98	40~65	48	940x470x500
R128FC	220	0.9	128	40~65	58	1240x470x500
R168FC	220	0.93	168	40~65	70	1540x470x500
DH-60	220	0.2	60	50	42	610x480x678
DH-80	220	0.22	95	50	58	905x480x678
HC-2	220	2.13	-	30~95	60	750x800x580

# Food Warmer

## Food Warmer



**DH-310**  
**Power:**1kw  
**Voltage:**220V  
**Temperature:**60°C  
**Net Weight:**7kg  
**Dimensions:** 330x560x500mm



**EHS-330**  
**Power:**0.6kw  
**Voltage:**220V  
**Temperature:**80°C  
**Net Weight:**5.5kg  
**Dimensions:** 340x565x420mm



**EHS-660**  
**Power:**1kw  
**Voltage:**220V  
**Temperature:**100°C  
**Net Weight:**13kg  
**Dimensions:** 860x370x420mm



**LTC-1F**  
220V,50Hz,0.5Kw  
Net Weight:8Kg  
Dimensions:  
530x565x555mm



**LTC-2F**  
220V,50Hz,1Kw  
Net Weight:14Kg  
Dimensions:  
910x565x555mm



**LTC-3F**  
220V,50Hz,1.5Kw  
Net Weight:23Kg  
Dimensions:  
1325x565x555mm

## Cup Warmer



**LR-OT-346**  
**Power:**1kw  
**Voltage:**220V  
**Net Weight:**21kg  
**Dimensions:**430x460x910mm

## Bread Showcase



**D-01**  
220V,0.48Kw  
Net Weight:42Kg  
Dimensions:  
705x430x685mm

**D-02**  
220V,0.48Kw  
Net Weight:42Kg  
Dimensions:  
705x430x685mm

**D-03**  
220V,0.48Kw  
Net Weight:42Kg  
Dimensions:  
705x430x685mm



Optional  
Pure Aluminium  
Semi-sanding  
Aluminum  
Bronze




**TFW-06**  
220V,0.48Kw  
Net Weight:42Kg  
Dimensions:  
705x430x685mm



**BV-BWD-2**  
**CE**  
Note:Food pan is additional  
**Power:**0.55kw  
**Voltage:**220V  
**Temperature:**60°C  
**Net Weight:**3kg  
**Dimensions:**500x355x(565~780)mm



**BV-BWZ-2**  
**CE**  
**Power:**1kw  
**Voltage:**220V  
**Temperature:**60°C  
**Net Weight:**11. 2kg  
**Dimensions:**770x500x700mm

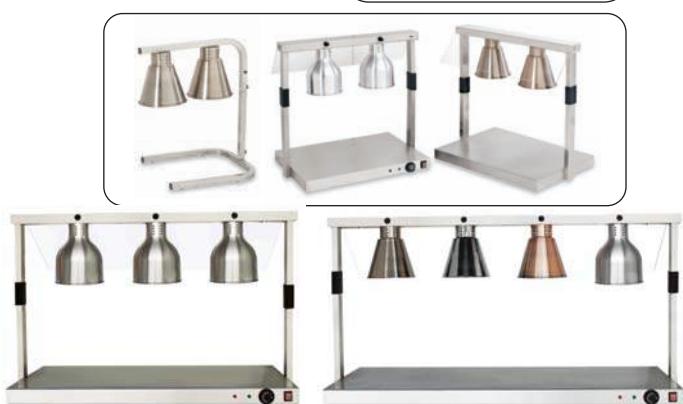

**BV-BWZ-3**  
**CE**  
**Power:**1.5kw  
**Voltage:**220V  
**Temperature:**60°C  
**Net Weight:**15. 2kg  
**Dimensions:**1070x500x700mm



**BV-BWZ-4**  
**CE**  
**Power:**2kw  
**Voltage:**220V  
**Temperature:**60°C  
**Net Weight:**20kg  
**Dimensions:**1370x500x700mm

# Soup Kettle & Electric Bain Marie

## Soup Kettle



**CE**

**SB-6000**

Capacity:10L

Net Weight:4.8kg

Temperature:35~95°C

Dimensions:340x340x395mm



**SB-6000A**

Capacity:13L

Net Weight:5.3kg

Temperature:35~95°C

Dimensions:400x400x320mm



**SB-6000S**

Capacity:9L

Net Weight:4.7kg

Temperature:35~95°C

Dimensions:340x340x395mm



**LR-BM-1**

**CE**



**LR-BM-2**

**CE**

**LR-BM-1**

Power:1.25kw

Voltage:220V

Net Weight:7kg

Temperature :50~85°C

Dimensions:345x375x270mm

**LR-BM-2**

Power:2.5kw

Voltage:220V

Net Weight:12.5kg

Temperature :50~85°C

Dimensions:695x375x270mm

## Electric Bain Marie



**GN1/1×1** **CE**



**GN1/2×2** **CE**



**GN1/3×3** **CE**

Model	Power (kw)	Voltage (v)	Temperature Range(°C)	Specification	Depth of Pan(mm)	Net Weight (kg)	Dimensions (mm)
<b>BS-65R</b>	2	220	30~80		65	11	715x400x205
<b>BS-100R</b>	2	220	30~80		100	12	715x400x240
<b>BS-150R</b>	2	220	30~80		150	13	715x400x290
<b>BS-200R</b>	2	220	30~80		200	14	715x400x340

**CE**

**BS-2T** | **BS-4T**  
---+---  
**BS-6T** | **BS-8T**

**CE**



**CE**



**CE**

Model	Power (kw)	Voltage (v)	Temperature Range(°C)	Specification	Depth of Pan(mm)	Net Weight (kg)	Dimensions (mm)
<b>BS-2T</b>	0.8	220	30~80	<b>GN1/2×2</b>	100	9	354x590x240
<b>BS-4T</b>	1.5	220	30~80	<b>GN1/2×4</b>	100	16	694x590x240
<b>BS-6T</b>	1.8	220	30~80	<b>GN1/2×6</b>	100	22.5	1035x590x240
<b>BS-8T</b>	1.8	220	30~80	<b>GN1/2×8</b>	100	29	1376x590x240

# Electric Bain Marie

## Electric Bain Marie



**VB-2A**

**Specification:**GN1/1x2  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 100mm  
**Net Weight:** 8kg  
**Dimensions:** 700x620x250mm



**VB-2B**

**Specification:**GN1/1x2  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 150mm  
**Net Weight:** 14kg  
**Dimensions:** 700x620x290mm



**VB-2C**

**Specification:**GN1/2x2  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 100mm  
**Net Weight:** 8kg  
**Dimensions:** 580x420x250mm



**VB-4A**

**Specification:**GN1/2x4  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 100mm  
**Net Weight:** 11.5kg  
**Dimensions:** 700x620x250mm



**VB-4B**

**Specification:**GN1/2x4  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 150mm  
**Net Weight:** 13.5kg  
**Dimensions:** 700x620x290mm



**VB-3**

**Specification:**GN1/3x3  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 150mm  
**Net Weight:** 10kg  
**Dimensions:** 580x420x290mm



**VB-6**

**Specification:**GN1/3x6  
**Voltage:** 220V  
**Power:** 1.4KW  
**Temperature:**40~85°C  
**Depth of Pan:** 150mm  
**Net Weight:** 16kg  
**Dimensions:** 710x630x290mm



**VB-6V**

**Specification:**GN1/3x150x6  
**Voltage:** 220V  
**Power:** 1.5KW  
**Net Weight:** 18kg  
**Dimensions:** 700x600x280mm

## Electric Bain Marie

### Bain Marie



**TZR1800** 



**TZLR Cool** 

Model	Power (kw)	Voltage (V)	Temperature Range(°C)	Specification	Depth of Pan(mm)	Net Weight (kg)	Dimensions (mm)
<b>TZR1200</b>	1.3	220	30~60	GN1/4×5	65	35	1200×315×255
<b>TZR1500</b>	1.5	220	30~60	GN1/4×6	65	45	1500×315×255
<b>TZR1800</b>	1.8	220	30~60	GN1/4×7	65	50	1800×315×255
<b>TZLR</b>	2	220	5~10/30~60	GN1/3×9	100	40	2030×450×600

### LR-BM Bain Marie



**LR-BM-3** 



**LR-BM-4** 



**LR-BM-5** 

Model	Power (kw)	Voltage (V)	Temperature Range(°C)	Depth of Pan(mm)	Specification	Net Weight (kg)	Dimensions (mm)
<b>LR-BM-3</b>	1.5	220	30~80	100	GN1/2 × 3	19	905×350×315
<b>LR-BM-4</b>	1.5	220	30~80	100	GN1/2 × 4	25	1170×350×315
<b>LR-BM-5</b>	1.8	220	30~80	100	GN1/2 × 5	34	1435×350×315

### LR-HBM Bain Marie





**LR-HBM-1160**

**LR-HBM-1530**

**LR-HBM-1710**

**LR-HBM-1950**













Model	Power (kw)	Voltage (V)	Temperature Range(°C)	Depth of Pan(mm)	Specification	Net Weight (kg)	Dimensions (mm)
<b>LR-HBM-1160</b>	1.8	220	30~80	100	GN1/2×1+GN1/3×4	17	1160×370×370
<b>LR-HBM-1530</b>	1.8	220	30~80	100	GN1/2×1+GN1/3×6	23	1530×370×370
<b>LR-HBM-1710</b>	1.8	220	30~80	100	GN1/2×1+GN1/3×7	26	1715×370×370
<b>LR-HBM-1950</b>	1.8	220	30~80	100	GN1/2×3+GN1/3×6	31	2070×370×370

# Electric Bain Marie

## LR-BM Bain Marie

**LR-BM-3W**

**Specification:**GN1/1×2+GN1/2×2  
**Power:**1.5kw  
**Voltage:**220V  
**Net Weight:**50kg  
**Depth of Pan:**100mm  
**Temperature:**30~85°C  
**Dimensions:**1110×1240×840mm

**LR-BM-4W**

**Specification:**GN1/1×2+GN1/2×4  
**Power:**1.5kw  
**Voltage:**220V  
**Net Weight:**60kg  
**Depth of Pan:**100mm  
**Temperature:**30~85°C  
**Dimensions:**1450×1240×840mm

**LR-BM-5W**

**Specification:**GN1/1×4+GN1/2×2  
**Power:**2kw  
**Voltage:**220V  
**Net Weight:**70kg  
**Depth of Pan:**100mm  
**Temperature:**30~85°C  
**Dimensions:**1785×1240×840mm

**LR-BM-6W**

**Specification:**GN1/1×4+GN1/2×4  
**Power:**2kw  
**Voltage:**220V  
**Net Weight:**80kg  
**Depth of Pan:**100mm  
**Temperature:**30~85°C  
**Dimensions:**2125×1240×840mm

**LR-BM-4L**

**Specification:**GN1/1×2+GN1/2×4  
**Power:**1.5kw  
**Voltage:**220V  
**Net Weight:**55kg  
**Depth of Pan:**100mm  
**Temperature:**30~85°C  
**Dimensions:**1450×650×870mm

**LR-BM-4H**

**Specification:**GN1/1×2+GN1/2×4  
**Power:**1.8kw  
**Voltage:**220V  
**Net Weight:**58kg  
**Depth of Pan:**150mm  
**Temperature:**30~85°C  
**Dimensions:**1450×650×870mm

**LR-BM-4S**

**Specification:**GN1/1×2+GN1/2×4  
**Power:**1.8kw  
**Voltage:**220V  
**Net Weight:**62kg  
**Depth of Pan:**150mm  
**Temperature:**30~85°C  
**Dimensions:**1450×650×870mm

# Kitchenware Equipment

## BV Kitchenware Equipment



### **BV-54C/4**

**4 Pans Chiller**  
Power:0.28kw  
Voltage:220V  
Net Weight:135kg  
Depth of Pan:100mm  
Temperature:0~8°C  
Dimensions:1500x950x1450mm

### **BV-54/BV-55/BV-56**

**Bain Marie**  
Power:3kw  
Voltage:220V  
Net Weight:98/112/126kg  
Depth of Pan:100mm  
Temperature:30~80°C  
Dimensions:1500x950x1450mm  
1900x950x1450mm  
2200x950x1450mm

### **BV-56-8**

**8 Pans Buffet Fridge**  
Power:0.35kw  
Voltage:220V  
Net Weight:260kg  
Depth of Pan:100mm  
Temperature:0~8°C  
Dimensions:1500x1400x1550mm

# C Dish Washing Machine

## Dish Washing Machine

### Features

- More efficient cleaning result and energy save because of the pre-wash and second rinse designs.
- Built-in booster heater,rinsing pump delivers constant water pressure and water temperature.
- Easy and efficient stainless steel conveyou with auto-protected stop equipment,operation way could be chosen(from left to right or opposite direction).



**C100**

### Optional accessories:

- A. Dirty dish desk(entrance working desk of dishwasher)
- B. Clean dish desk(exit working desk od dishwasher)
- C. High pressure water faucet
- D. Double pump dispenser
- E. Dish-washing basket
- F. Specified detergent for dishwasher,specified drier for dishwasher




**C88**

## Cup Washing Machine





**SB-1**

**Power:** 0.25kw  
**Net Weight:** 7kg  
**Speed:** 2750r/min  
**Dimensions:**  
 200x300x250mm



**C88**

<b>Capacity</b>	1000 Piece/h 60 Rack/h
<b>Main Wash Tank Capacity</b>	34.5L
<b>Rinse Capacity</b>	22L
<b>Tank Temp.</b>	50~70°C
<b>Temp.Boiler</b>	75~95°C
<b>Water Pressure</b>	1.4Bar
<b>Electrical Power</b>	380V/3L/N/PE/50Hz
<b>Heater Tank</b>	100W
<b>Heater Rinse Tank</b>	9kw
<b>Motor Pump</b>	1.5kw
<b>Total Electrical Power</b>	13kw
<b>Dimensions</b>	740x870x1430mm
<b>Height When Open Machine</b>	1750mm
<b>Door Entry Height</b>	400mm
<b>Net Weight</b>	120kg



<b>Capacity</b>	2600 Piece/h 130 Rack/h
<b>Main Wash Tank Capacity</b>	91L
<b>Rinse Capacity</b>	24L
<b>Tank Temp.</b>	50~70° C
<b>Temp.Boiler</b>	75~95° C
<b>Water Pressure</b>	1.4Bar
<b>Electrical Power</b>	380V/3L/N/PE/50Hz
<b>Heater Tank</b>	100W
<b>Heater Boiler</b>	27kw
<b>Heater Rinse Tank</b>	9kw
<b>Motor Conveyor</b>	750W
<b>Motor Pump</b>	1.5kw
<b>Total Electrical Power</b>	36kw
<b>Size of Breaker</b>	54.7A
<b>Dimensions</b>	1100x780x1630mm
<b>Height When Open Machine</b>	2100mm
<b>Door Entry Height</b>	400mm
<b>Net Weight</b>	233kg

# Juicer Dispenser

## SC&MC Juicer Dispenser

- Reasonable configuration.
- Excellent performance.
- Easy control.
- The body are made of stainless steel, the bowl are made of PC.
- Use Copper pipe to keep more quick and durable for cooling.



M: Mixing  
S: Spraying

C: Cooling 7~12°C  
H: Heating 52~58°C

**MC50L/SC50L**  
Power:0.33kw  
Voltage:220V  
Capacity:50L×1  
Net weight:26kg  
Dimensions:  
500x500x720mm

**MCH50L/SCH50L**  
Power:  
Cold:0.33kw Hot:0.6kw  
Voltage:220V  
Capacity:50L×1  
Net weight:26kg  
Dimensions:  
500x500x720mm



CE

## FC Juicer Dispenser



**FC-112**  
Power: 0.12kw  
Voltage: 220V  
Capacity: 12L×1  
Net Weight: 20kg  
Temperature Range: 5~10°C  
Dimensions: 260×430×650mm

**FC-212**  
Power: 0.18kw  
Voltage: 220V  
Capacity: 12L×2  
Net Weight: 30kg  
Temperature Range: 5~10°C  
Dimensions: 410×430×650mm



**FC-312**  
Power: 0.23kw  
Voltage: 220V  
Capacity: 12L×3  
Net Weight: 35kg  
Temperature: 5~10°C  
Dimensions: 610×430×650mm

**FC-412**  
Power: 0.28kw  
Voltage: 220V  
Capacity: 12L×4  
Net Weight: 60kg  
Temperature: 5~10°C  
Dimensions: 820×430×650mm



# Slush Machine

## Slush Machine

- Eight-speed and pulse for adjustment.
- Quiet heavy-duty motor.
- Makes delicious ice desserts



## 15L Slush Machine



**SM15Lx1**

**Power:** 0.3kw  
**Voltage:** 220V  
**Capacity:**15L  
**Temperature:**-2~3°C  
**Net Weight:** 29kg  
**Dimensions:** 290x560x760mm



**SM15Lx2**

**Power:** 0.4kw  
**Voltage:** 220V  
**Capacity:**15Lx2  
**Temperature:**-2~3°C  
**Net Weight:** 41kg  
**Dimensions:** 420x560x760mm



**SM15Lx3**

**Power:** 0.5kw  
**Voltage:** 220V  
**Capacity:**15L x3  
**Temperature:**-2~3°C  
**Net Weight:** 58kg  
**Dimensions:** 600x560x760mm

## 12L Slush Machine&Juicer Dispenser



**SM12Lx2A**

**Power:** 0.6kw  
**Voltage:** 220V  
**Capacity:**12L x2  
**Temperature:**5~10°C/-2~3°C  
**Net Weight:** 64kg  
**Dimensions:** 380x620x760mm



**SM12Lx2**

**Power:** 0.5kw  
**Voltage:** 220V  
**Capacity:**12L x2  
**Temperature:**5~10°C/-2~3°C  
**Net Weight:** 44kg  
**Dimensions:** 430x510x770mm



**SM12Lx3**

**Power:** 0.6kw  
**Voltage:** 220V  
**Capacity:**12L x3  
**Temperature:**5~10°C/-2~3°C  
**Net Weight:** 63kg  
**Dimensions:** 610x510x770mm

## Blender & Mill Shake Machine

### BL Blender



CE

**BL-767**

**Power:** 1.5kw  
**Voltage:** 220V  
**Jug Capacity:** 2L  
**Net Weight:** 4.25kg  
**Dimensions:** 435×300×340mm



CE

**BL-999Z**

**Power:** 1.8kw  
**Voltage:** 220V  
**Capacity:** 2L  
**Net Weight:** 7.3kg  
**Dimensions:** 355×290×605mm

### Milk Shake Machine



#### Features

Powerful Motor  
Made of Stainless steel  
Lower noise  
Easy to control

**D-1**

220V,50Hz,0.18kw  
Capacity: 0.5L  
Net Weight: 4.7kg  
Dimensions: 185×185×520mm



**D-2**

220V,50Hz,0.18kw  
Capacity: 0.5L×2  
Net Weight: 7.1kg  
Dimensions: 230×185×520mm

# Ice Crusher

## Ice Crusher



CE

**SB-6**

**Power:**0.18kw  
**Voltage:**220V  
**Weight:**13kg  
**Productivity:**96kg/h  
**Dimensions:**430×210×300mm



**SL-108**

**Power:**0.3kw  
**Voltage:**220V  
**Net Weight:**5. 5/12kg  
**Productivity:**65kg/h  
**Dimensions:**400×160×250mm

Note:Cast Iron (Silver),  
Plastic(Silver/Orange/Blue)



Made of stainless steel  
With two blade,  
Ice more fine,like snow  
Three time capacity than others



**ZY-114**

**Power:**0.2kw  
**Voltage:**220V  
**Weight:**7. 5kg  
**Dimensions:**405×245×425mm



**PB240**

**Power:**0.18kw  
**Voltage:**220V  
**Net Weight:**43kg  
**Productivity:**120kg/h  
**Dimensions:**422×402×745mm



## WF Ice Crusher



CE

**WF-A168**



CE

**WF-A228**

**WF-A168**

**Power:**0.25kw  
**Voltage:**220V  
**Net Weight:**24kg  
**Dimensions:**280×380×450mm

**WF-A228**

**Power:**0.18kw  
**Voltage:**220V  
**Net Weight:**23kg  
**Productivity:**85kg/h  
**Dimensions:**280×380×430mm



CE

**WF-A288**



CE

**WF-A268**

**WF-A288**

**Power:**0.25kw  
**Voltage:**220V  
**Net Weight:**20kg  
**Productivity:**90kg/h  
**Dimensions:**420×340×700mm

**WF-A268**

**Power:**0.18kw  
**Voltage:**220V  
**Net Weight:**27kg  
**Dimensions:**435×300×720mm

# Ice Maker

## Ice Maker



**ZB-14**  
 220V, 50Hz, 0.13kw  
 Daily production: 13kg/24h  
 Bin capacity: 1.8kg  
 Net weight: 13.5kg  
 Dimensions: 305×380×380mm



**ZB-23**  
**Power:** 0.17kw  
**Voltage:** 220V  
**Bin Capacity:** 4kg  
**Net Weight:** 28kg  
**Daily Production:** 23kg/24h  
**Dimensions:** 380×480×590mm



**ZB-26 ZB-50**  
**Power:** 0.22/0.28kw  
**Voltage:** 220V  
**Bin Capacity:** 6/10kg  
**Net Weight:** 35/50kg  
**Daily Production:** 26/50kg/24h  
**Dimensions:** 420×528×655mm  
 496×610×790mm



## IT Ice Maker



**IT-45**  
**IT-36**



**IT-68**  
**IT-95**  
**IT-118**



**IT-136~IT-817**

Model	Power (kw)	Voltage (V)	Max Ice Production(kg)	Max Ice Storage(kg)	Net Weight (kg)	Dimensions (mm)
<b>IT-36</b>	0.39	220	36	15	48	502×500×760
<b>IT-45</b>	0.46	220	45	15	49	502×500×760
<b>IT-68</b>	0.65	220	68	40	64	660×680×823
<b>IT-95</b>	0.72	220	95	45	65	660×680×823
<b>IT-118</b>	0.8	220	118	50	66	660×680×823
<b>IT-136</b>	0.96	220	136	120	102	560×830×1520
<b>IT-181</b>	1.01	220	181	120	102	560×830×1520
<b>IT-227</b>	1.28	220	227	150	120	760×830×1520
<b>IT-272</b>	1.38	220	272	150	120	760×830×1520
<b>IT-318</b>	1.48	220	318	150	125	760×830×1640
<b>IT-363</b>	1.68	220	363	150	125	760×830×1640
<b>IT-454</b>	1.78	220	454	150	146	760×830×1760
<b>IT-590</b>	3.06	220	590	300	229	1220×920×1640
<b>IT-817</b>	4.35	220	817	300	240	1220×920×1760

# Ice Cream Machine

## Countertop Ice Cream Machine

**LR-IC-8T**

220V,50Hz,1.7kw  
Production Capacity:12-18kg/h (17-28L/h)  
Cups per Hour(80g/cup):200-300 cups  
Hopper Capacity:2x5.8L  
Net Weight:116kg  
Dimension:518x745x770mm

**LR-IC-11T**

220V,50Hz,1.5kw  
Production Capacity:10-14kg/h(14-20L/h)  
Cups per Hour(80g/cup):330-420 cups  
Hopper Capacity:1x12L  
Net Weight:100kg  
Dimension:473x830x790mm

## Ice Cream Machine

**LR-IC-2/LR-IC-3**

220V,50Hz,1.7kw/2.6kw  
Production Capacity:  
12-18kg/h(17-28L/h)  
20-25kg/h( 28-36L/h)  
Cups per Hour(80g/cup):200-300 cups  
330-420 cups  
Hopper Capacity:2x5.8L  
Net Weight:143kg/158kg  
Dimension:518x745x1425mm  
518x745x1425mm

## Hard Ice Cream Machine

**BQ-105**

220V,50Hz,0.5kw  
Production Capacity:5-8kg/h(7-11L/h)  
Hopper Capacity:3.3L  
Net Weight:40kg  
Dimension:485x450x525mm

**BQY-16/BQY-18**

220V,50Hz,1.7kw/2.6kw  
Production Capacity:  
16-20kg/h(28-38L/h)  
12-16kg/h(20-28L/h)  
Hopper Capacity:5L/6.4L  
Net Weight:118kg/138kg  
Dimension:518x808x1260mm  
518x788x1360mm

**BQ-28**

380V,50Hz,3.5kw  
Production Capacity:  
22-30kg/h(40-58L/h)  
Hopper Capacity:14L  
Net Weight:168kg  
Dimension:518x710x1385mm

**BQ-28**

# Cake Showcase

## Square Series Cake Showcase



Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
CD-120W2	0.59	220	350	150	1200×730×1060
CD-150W2	0.83	220	445	180	1500×730×1060
CD-180W2	0.9	220	545	230	1800×730×1060
CD-200W2	0.92	220	610	250	2000×730×1060
CD-240W2	1.27	220	740	250	2400×730×1060

**Marble Base**  
Temperature: 2~8°C

**CD-120W2**

Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
SG222BFA	0.6	220	220	215	900×670×1060
SG322BFA	0.66	220	320	245	1200×670×1060
SG422BFA	0.95	220	420	290	1500×670×1060
SG522BFA	1	220	520	315	1800×670×1060
SG722BFA	1.35	220	720	390	2400×670×1060



**SG322BFA**



**G222BFB**

Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
SG200BF	0.28	220	290	173	900×730×1200
SG300BF	0.28	220	390	205	1200×730×1200
SG400BF	0.38	220	490	225	1500×730×1200
SG500BF	0.38	220	590	280	1800×730×1200



**G300BF**

## Square Series Cake Showcase



**SG330BF**

Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
SG230BF	0.75	220	280	160	900×660×1200
SG330BF	0.85	220	380	190	1200×660×1200
SG430BF	1	220	480	223	1500×660×1200
SG530BF	1.2	220	580	230	1800×660×1200

## Cake Showcase

### Deeper Series Cake Showcase(Stainless Steel Base)



**SG230FC**

Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
<b>SG230FC</b>	0.75	220	230	150	900×660×1200
<b>SG330FC</b>	0.85	220	330	170	1200×660×1200
<b>SG430FC</b>	1	220	430	223	1500×660×1200
<b>SG530FC</b>	1,2	220	530	230	1800×660×1200




**SG310F**

Optional: Silver or golden trim



**SG280FC**

Model	Power (kw)	Voltage (V)	Capacity (L)	Net Weight (kg)	Dimensions (mm)
<b>SG280FC</b>	0.75	220	380	245	900×840×1380
<b>SG380FC</b>	0.95	220	480	295	1200×840×1380
<b>SG480FC</b>	1.28	220	580	335	1500×840×1380
<b>SG580FC</b>	1.6	220	680	380	1800×840×1380



Model	Power (kw)	Voltage (V)	Storage Volume(L)	Temperature Range(°C)	Net Weight (kg)	Dimensions (mm)
<b>CD-120L3</b>	0.73	220	344	2~8	250	1200×850×1200
<b>CD-150L3</b>	0.95	220	438	2~8	285	1500×850×1200
<b>CD-180L3</b>	1.2	220	532	2~8	325	1800×850×1200
<b>CD-200L3</b>	1.2	220	595	2~8	365	2000×850×1200
<b>CD-240L3</b>	1.43	220	720	2~8	410	2400×850×1200




**CD-150L3**

# Cake Showcase

## Combination Cake Display

### Features:

- Adjustable shelves.
- High-density foam, closed glass structure ,good insulation,energy -saving.
- Air cooling ,air-cooled circulation ,cooling speed,temperature is even.
- Each shelf with lights, enhancing display effect.
- Hollow insulated safety glass, the glass door with heater defrosting, reducing consumption.
- Refrigerating or heating or ambient temperature.
- Stainless steel, marble or artificial stone( the color can be selected according to the customer request).
- Refrigerant : R134a.

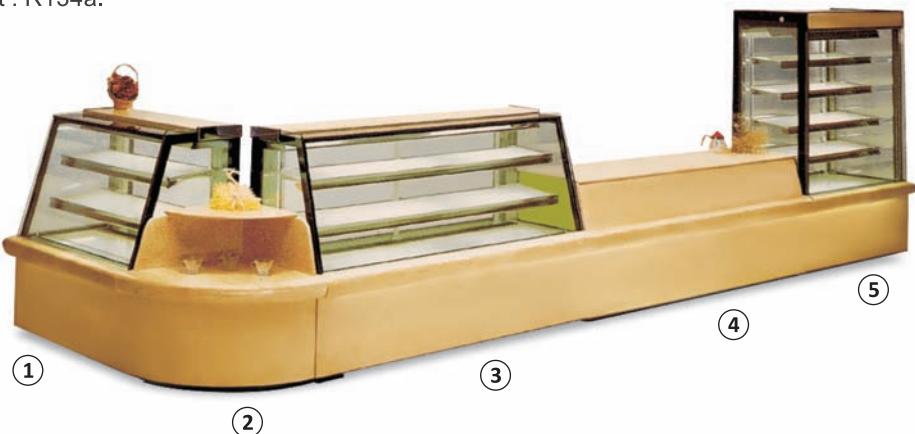

Part NO	Name	Dimensions L×W×H (mm)	Temperature Range( °C )	Material
1 / 3	Luxurious Cake showcases (CD-B3 )	1200×730×1200	2~8	Marble or artificial
		1500×730×1200		
2	Ark of corner	1800×730×1200		
		2000×730×1200		
4	The cashier	730×730×800	---	Marble or artificial
		1200×730×850		
		1500×730×850		
5	Vertical Cake showcase (CD-I5)	1800×730×850		
		1200×730×1800	2~8	Marble or artificial
		1500×730×1800		
		1800×730×1800		



### Corner Display



**SBZJ02**  
Material:Marble  
Dimensions:730×730×510mm

**SBZJ01**  
Material:Marble  
Dimensions:840×840×510mm

**SS-SBZJ02**  
Material:Stainless Steel  
Dimensions:660×660×510mm

**SS-SBZJ01**  
Material:Stainless Steel  
Dimensions:804×804×510mm

### Cashier Counter



**SBZT02**  
Material:Marble  
Dimensions:600×840×790mm

**SBZT03**  
Material:Marble  
Dimensions:1200×730×790mm

**SS-SBZT02**  
Material:Stainless Steel  
Dimensions:600×804×790mm

**SS-SBZT03**  
Material:Stainless Steel  
Dimensions:1200×660×790mm

### SF Ice Cream Showcase



**SF-90V(GN1/3 x4)**

220V, 50Hz, 0.42kw  
Storage Volume: 140 L  
Temperature:-15°C~20°C  
Pan Size:GN1/3x100mm  
Net Weight: 90kg  
Dimensions: 900x540x790mm

### Features:

- FRP decorative exteriors.
- #304 stainless steel interiors
- High quality digital temperature controller
- Low pressure hermetic compressor, low noise less than 55db
- Automatic defrosts system
- Voltage and cycles upon request



**SF-120V(GN1/3 x5)**

220V, 50Hz, 0.48kw  
Storage Volume: 190L  
Temperature:-15°C~20°C  
Pan Size:GN1/3x100mm  
Net Weight: 115kg  
Dimensions: 1200x540x790mm



**SF-150V(GN1/3 x7)**

220V, 50Hz, 0.57kw  
Storage Volume: 240L  
Temperature:-15°C~20°C  
Pan Size:GN1/3x100mm  
Net Weight: 120kg  
Dimensions: 1500x540x790mm

### IC Ice Cream Showcase



**IC-16S**

220 V,50Hz,2kw  
Storage Volume: 90L  
Temperature:-12~-16°C  
Net Weight: 183 kg  
Pan Size: GN2/4x16Pcsx150mm  
Dimension: 1525x875x1280mm

**IC-14S**

220 V,150Hz,1.2kw  
Storage Volume: 90L  
Temperature:-12~-16°C  
Net Weight: 183 kg  
Pan Size: GN1/4x14Pcsx150mm  
Dimension: 1360x875x1280mm



# Wine Cooler

## Wine Cooler

### Features:

- Intelligent thermostat system with LED display
- Low vibration design for wines rest in peace
- Auto defrosting
- Odor free activated carbon filter
- Moisturizing embossed aluminum cabinet
- UV protected tinted glass

Ambient temperature:38°C

Imported sapele & beech solid wood  
Optional 2-5 shelves



2 pieces of sapele wood shelves,  
with long handle sets and interlock

YC-103A

Power:0.16kw  
Voltage:220V  
Temperature:5~22°C  
Storage Volume:154L  
Bottling capacity:52Bottles  
Net Weight:46kg  
Chamber Size:464x527x684mm  
Dimension:595x600x845mm

Directing Cooling



Three Color to choose



MOQ : 20Pcs

Imported sapele & beech solid wood  
Optional 3-9 shelves



3 pieces of sapele wood shelves,  
with long handle sets and interlock

YC-188A

Power:0.16kw  
Voltage:220V  
Temperature:5~22°C  
Storage Volume:240L  
Bottling capacity:72~76 Bottles  
Net Weight:70kg  
Chamber Size:464x527x1104mm  
Dimension:595x600x1215mm

Directing Cooling



Imported sapele & beech solid wood  
Optional 4-13 shelves



4 pieces of sapele wood shelves,  
with long handle sets and interlock

YC-270A

Power:0.2kw  
Voltage:220V  
Temperature:5~22°C  
Storage Volume:380L  
Bottling capacity:155 Bottles  
Net Weight:83kg  
Chamber Size:544x527x1434mm  
Dimension:595x680x1615mm

Directing Cooling



Imported sapele & beech solid wood  
Optional 5-15 shelves



5 pieces of sapele wood shelves,  
with long handle sets and interlock

YC-450A

Power:0.22kw  
Voltage:220V  
Temperature:5~22°C  
Storage Volume:450L  
Bottling capacity:168~177 Bottles  
Net Weight:90kg  
Chamber Size:544x527x1614mm  
Dimension:595x680x1795mm

Directing Cooling



# Beverage Display Cabinet

## Beverage Display Cabinet



SG-360A1



SD-360FA1  
SG-360FA1



### Direct Cooling

**SG-360A1**  
220V, 50Hz, 0.21kw  
Capacity: 350L  
Temperature: 2°C~8°C  
Net Weight: 100kg  
Dimensions: 600x650x2100mm

### Fan Cooling

**SG-360FA1**  
220V, 50Hz, 0.24kw  
Capacity: 310L  
Temperature: 2°C~8°C  
Net Weight: 108kg  
Dimensions: 600x700x2100mm

### Fan Cooling

**SD-360FA1**  
220V, 50Hz, 0.66kw  
Capacity: 310L  
Temperature: -18°C~-25°C  
Net Weight: 110kg  
Dimensions: 640x730x2180mm

## Features

With lock, safe, and reliable  
Fast cooling, even temperature.  
Adoption of environment-friendly pollution-free freezing agent and vesicant.  
High quality plastic-covered steel plate used for box body.  
Intelligent electronic temperature controller.



## Beverage Display Cabinet



SG-860A2  
SG-860FA2  
SD-860FA2



CE  
SG-860FB2  
CE

### Direct Cooling

**SG-860A2**  
220V, 50Hz, 0.34kw  
Capacity: 768L  
Temperature: 2°C~8°C  
Net Weight: 160kg  
Dimensions: 1200x650x2100mm

### Fan Cooling

**SG-860FA2**  
220V, 50Hz, 0.38kw  
Capacity: 670L  
Temperature: 2°C~8°C  
Net Weight: 168kg  
Dimensions: 1200x700x2100mm

### Fan Cooling

**SD-860FA2**  
220V, 50Hz, 0.38kw  
Capacity: 670L  
Temperature: -18°C~-25°C  
Net Weight: 180kg  
Dimensions: 1240x730x2180mm

### Slidingdoor Fan Cooling

**SG-860FB2**  
220V, 50Hz, 0.38kw  
Capacity: 670L  
Temperature: 2°C~8°C  
Net Weight: 168kg  
Dimensions: 1220x700x2100mm

# Beverage Display Cabinet

## Beverage Display Cabinet

-18°C~-25°C



### Fan Cooling

**SD-1260FA3**

220V, 50Hz, 1.96kw

Capacity: 1100L

Temperature:-18°C~-25°C

Net Weight: 240kg

Dimensions:1840x730x2180mm



CE

**SD-1260FA3**

### Features:

With lock, safe, and reliable

Fast cooling, even temperature.

Adoption of envirment-friendly pollution-free freezing agent and vesicant.

High quality plastic-covered steel plate used for box body.

Intelligent electronic temperature controller.



## Beverage Display Cabinet

2°C~8°C



CE

**SG-1260A3**

### Direct Cooling

220V, 50Hz, 0.46kw

Capacity: 1180L

Temperature:2°C~8°C

Net Weight: 220kg

Dimensions: 1800x650x2100mm



CE

**SG-1260FA3**

### Fan Cooling

220V, 50Hz, 0.53kw

Capacity: 1100L

Temperature:2°C~8°C

Net Weight: 228kg

Dimensions: 1800x700x2100mm

# Freezing Working Bench

## Freezing Working Bench

### Features:

- CFC free refrigerant and foam.
- Stainless steel framework construction.
- Electronic thermostat and LED digital display.
- Automatic defrosting, automatic evaporation of defrost water.
- Bottom with round edges for easy sanitation.
- Temperature Range:2~8°C



**D-2A**  
220V,50Hz,0.4kw  
Capacity:260L  
Net Weight:98kg  
Internal size:794×560×580mm  
Dimensions:1360×700×850mm

**D-2AH**  
220V,50Hz,0.4kw  
Capacity:260L  
Net Weight:106kg  
Internal size:794×560×580mm  
Dimensions:1360×700×1050mm

**D-1A2**  
220V,50Hz,0.4kw  
Capacity:260L  
Net Weight:105kg  
Internal size:794×560×580mm  
Dimensions:1360×700×850mm

**D-1A4**  
220V,50Hz,0.4kw  
Capacity:400L  
Net Weight:115kg  
Internal size:1230×560×580mm  
Dimensions:1795×700×850mm



**D-3A**  
220V,50Hz,0.4kw  
Capacity:400L  
Net Weight:115kg  
Internal size:1230×560×580mm  
Dimensions:1795×700×850mm

**D-A6**  
220V,50Hz,0.4kw  
Capacity:400L  
Net Weight:140kg  
Internal size:1230×560×580mm  
Dimensions:1795×700×850mm

**D-2A3**  
220V,50Hz,0.4kw  
Capacity:400L  
Net Weight:127kg  
Internal size:1230×560×580mm  
Dimensions:1795×700×850mm



**D-3AH**  
220V,50Hz,0.4kw  
Capacity:400L  
Net Weight:150kg  
Internal size:1230×560×580mm  
Dimensions:1795×700×1050mm

**D-3A2**  
220V,50Hz,0.4kw  
Capacity:540L  
Net Weight:155kg  
Internal size:1669×560×580mm  
Dimensions:2230×700×850mm

**D-4A**  
220V,50Hz,0.4kw  
Capacity:540L  
Net Weight:141kg  
Internal size:1669×560×580mm  
Dimensions:2230×700×850mm

# Freezing Working Bench

## Freezing Working Bench



CE TD-320A2



CE TD-320B2



CE TD-420A3  
TD-520A3



CE TD-420B3  
TD-520B3

Model	Power (kw)	Capacity (L)	Voltage (V)	Temperature Range(°C)	Internal Size (mm)	Net Weight (kg)	Dimensions (mm)
TD-320A2	0.32	320	220	0~10	960×660×510	92	1500×800×810
TD-420A3	0.49	420	220	0~10	1260×660×510	115	1800×800×810
TD-520A3	0.53	520	220	0~10	1560×660×510	125	2100×800×810
TD-320B2	0.32	320	220	0~10	960×660×510	95	1500×800×(810+150)
TD-420B3	0.31	420	220	0~10	1260×660×510	118	1800×800×(810+150)
TD-520B3	0.53	520	220	0~10	1560×660×510	130	2100×800×(810+150)

## Electric Cool Bain-Marin

## Electric Cool and Warm Bain-Marin



MOQ: 5pcs

## Electric Cool Bain-Marin



TZL Series

## Sushi Showcase



G120LA Series



BM Series

Model	Power (kw)	Voltage (V)	Specification	Volume (L)	Temperature Range(°C)	Depth of Pan(mm)	Net Weight (kg)	Dimensions (mm)
FBM1950C	1.6	220	GN1/3x8	~	-6~8	150	68	1950×430×525
FBM1950CW	2.2	220	GN1/3x8	~	-6~85	150	71	1950×430×525
TZL1200	0.28	220	GN1/4x4	~	5~10	100	25	1200×315×400
TZL1500	0.28	220	GN1/4x6	~	5~10	100	27	1500×315×400
TZL1800	0.35	220	GN1/4x8	~	5~10	100	29	1800×315×400
BM1200C	0.2	220	GN1/2x1+GN1/3x3	~	2~8	150	43	1200×380×430
BM1500C	0.2	220	GN1/2x1+GN1/3x5	~	2~8	150	52	1500×380×430
BM1800C	0.2	220	GN1/3x8	~	2~8	150	58	1800×380×430
G120LA	0.23	220	~	50	2~8	~	33	1220×350×306
G150LA	0.25	220	~	68	2~8	~	38	1520×350×306
G180LA	0.35	220	~	85	2~8	~	43	1820×350×306
G210LA	0.37	220	~	103	2~8	~	48	2120×370×306

Note:Design and specification are subject to change without notice

# Vertical Stainless Steel Freezer

**Stainless steel upright with split doors**

*Upright Refrigerators All Stainless steel*

**Ambient operating temperature 36°C**

**With Split doors effeciency is increased by 25%**

**Temperature:-15~18°C**



CE



CE

**Specification:**

**-15~18°C**

**D-670FA1/D-670FA2**

220V,50Hz,0.51kw

Capacity:670L

Net Weight:120kg

Internal size:640x690x1505mm

Dimensions:760x830x2070mm

**Fan Cooling**

*4 level of shelving plus floor*

*Fan-forced evaporator cooling*

*Internal corner are rounded for hygiene& easy clean*

*Self evaporating drainage*

*Auto Defrost*

*Upright Refrigerators All Stainless steel*

**Ambient operating temperature 36°C**

**With Split doors effeciency is increased by 25%**

**Temperature:-15~18°C**



CE



CE

**Specification:**

**-15~18°C**

**D-670A1/D-670A2**

220V,50Hz,0.4kw

Capacity:670L

Net Weight:120kg

Internal size:640x690x1505mm

Dimensions:760x830x2070mm

**Direct Cooling**

*4 level of shelving plus floor*

*Internal corner are rounded for hygiene&easy clean*

*Self evaporating drainage*

# Vertical Stainless Steel Freezer

## **Stainless steel upright with split doors**

*Upright Refrigerators All Stainless steel*

**Ambient operating temperature 36°C**

**With Split doors effeciency is increased by 25%**

**Temperature : -15~ -18°C**



D-1460FA2 CE



D-1460FA4 CE

### Specification:

**-15~ -18°C**

**D-1460FA2/D-1460FA4**

220V,50Hz,0.79kw

Capacity:1460L

Net Weight:210kg

Internal size:1395x690x1505mm

Dimensions:1515x830x2070mm

### Fan Cooling

*4 level of shelving plus floor*

*Fan-forced evaporator cooling*

*Internal corner are rounded for hygiene&easy clean*

*Self evaporating drainage*

*Auto Defrost*

*Upright Refrigerators All Stainless steel*

**Ambient operating temperature 36°C**

**With Split doors effeciency is increased by 25%**

**Temperature : -15~ -18°C/0~10°C**



D-1460A2 CE  
DG-1460A2



D-1460A4 CE  
DG-1460A4

### Specification:

**-15~ -18°C**

**-15~ -18°C**

**0~10°C**

**DG-1460A2**

**DG-1460A4**

220V,50Hz,0.68kw

Capacity:1460L

Net Weight:210kg

Internal size:1395x690x1505mm

Dimensions:1515x830x2070mm

### Direct Cooling

*4 level of shelving plus floor*

*Internal corner are rounded for hygiene&easy clean*

*Self evaporating drainage*

# Vertical Stainless Steel Freezer

**Stainless steel upright with split doors** MOQ:5PCS

*Upright Refrigerators All Stainless steel*

**With Split doors effeciency is increased by 25%**

**Temperature: 2~8°C**



GN-623F



GN-623F2

## Fan Cooling

*Stainless steel interior and exterior*

*Electronic Controller*

*One piece interior floor*

*Adjustable stainless steel legs*

*Adjustable stainless steel tracks*

*Fit for 10 international standard 1/1 GN Pans*

*Hidden Door Handles*

### GN-623F

220V,50Hz,0.25kw

**Capacity:**623L

**Net Weight:**kg

**Dimensions:**730x830x2050mm

**MOQ:**10Pcs

### GN-623F2

220V,50Hz,0.25kw

**Capacity:**623L

**Net Weight:**kg

**Dimensions:**730x830x2050mm

**MOQ:**10Pcs

**Temperature: -15~-20°C**



GN-623FD



GN-623FD2

## Fan Cooling

*Stainless steel interior and exterior*

*Electronic Controller*

*One piece interior floor*

*Adjustable stainless steel legs*

*Adjustable stainless steel tracks*

*Fit for 10 international standard 1/1 GN Pans*

*Hidden Door Handles*

### GN-623FD

220V,50Hz,0.468kw

**Capacity:**623L

**Net Weight:**kg

**Dimensions:**730x830x2050mm

**MOQ:**10Pcs

### GN-623FD2

220V,50Hz,0.468

**Capacity:**623L

**Net Weight:**kg

**Dimensions:**730x830x2050mm

**MOQ:**10Pcs

# Vertical Stainless Steel Freezer

MOQ:5PCS **Stainless steel upright with split doors**

*Upright Refrigerators All Stainless steel*

**With Split doors effeciency is increased by 25%**

**Temperature : 2~8°C**



GN-1295F2



GN-1295F4

**GN-1295F2**

220V,50Hz,0.735kw

**Capacity:**1295L

**Net Weight:**kg

**Dimensions:**1400x830x2050mm

**MOQ:**10Pcs

**GN-1295F4**

220V,50Hz,0.735kw

**Capacity:**1295L

**Net Weight:**kg

**Dimensions:**1400x830x2050mm

**MOQ:**10Pcs

## Fan Cooling

*Stainless steel interior and exterior*

*Electronic Controller*

*One piece interior floor*

*Adjustable stainless steel legs*

*Adjustable stainless steel tracks*

*Fit for 10 international standard 1/1 GN Pans*

*Hidden Door Handles*

**Temperature : -15~20°C**



GN-1295FD2



GN-1295FD4

**GN-1295FD2**

220V,50Hz,0.75kw

**Capacity:**1295L

**Net Weight:**kg

**Dimensions:**1400x830x2050mm

**MOQ:**10Pcs

**GN-1295FD4**

220V,50Hz,0.75kw

**Capacity:**1295L

**Net Weight:**kg

**Dimensions:**1400x830x2050mm

**MOQ:**10Pcs

## Fan Cooling

*Stainless steel interior and exterior*

*Electronic Controller*

*One piece interior floor*

*Adjustable stainless steel legs*

*Adjustable stainless steel tracks*


*Fit for 10 international standard 1/1 GN Pans*

*Hidden Door Handles*

# Work Tables & Equipment Stands

## Assembling 2 Deck Working Table With Back

- Heavy Duty 201 series stainless steel top
- Plastic or stainless steel legs and undershelf
- Four inch backsplash
- Adjustable bullet feet

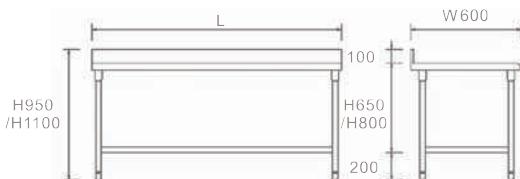

BV600-B

BV760-B  
BV700-B

### 600 Series Work Tables

Model	Dimension L×W×H(mm)
<b>BV600-60B</b>	600×600×(850+100)
<b>BV600-90B</b>	900×600×(850+100)
<b>BV600-120B</b>	1200×600×(850+100)
<b>BV600-150B</b>	1500×600×(850+100)
<b>BV600-180B</b>	1800×600×(850+100)
<b>BV600-230B</b>	2300×600×(850+100)

### 700 Series Work Tables

Model	Dimension L×W×H(mm)
<b>BV700-60B</b>	600×700×(850+100)
<b>BV700-90B</b>	900×700×(850+100)
<b>BV700-120B</b>	1200×700×(850+100)
<b>BV700-150B</b>	1500×700×(850+100)
<b>BV700-180B</b>	1800×700×(850+100)
<b>BV700-230B</b>	2300×700×(850+100)

### 760 Series Work Tables

Model	Dimension L×W×H(mm)
<b>BV760-90B</b>	910×760×(850+100)
<b>BV760-120B</b>	1200×760×(850+100)
<b>BV760-150B</b>	1500×760×(850+100)
<b>BV760-180B</b>	1800×760×(850+100)


### 800 Series Work Tables

Model	Dimension L×W×H(mm)
<b>BV800-120B</b>	1200×800×(850+100)
<b>BV800-150B</b>	1500×800×(850+100)
<b>BV800-180B</b>	1800×800×(850+100)

## Assembling 2 Deck Working Table



BV700-AL




### 700 Series Work Tables

Model	Dimension L×W×H(mm)
<b>BV700-80AL</b>	800×700×850
<b>BV700-100AL</b>	1000×700×850
<b>BV700-120AL</b>	1200×700×850
<b>BV700-140AL</b>	1400×700×850
<b>BV700-160AL</b>	1600×700×850
<b>BV700-180AL</b>	1800×700×850
<b>BV700-200AL</b>	2000×700×850
<b>BV700-220AL</b>	2200×700×850

## Assembling 2 Deck Working Table With Back



BV700-14BL

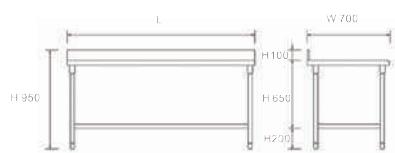

### 700 Series Work Tables


Model	Dimension L×W×H(mm)
<b>BV700-80BL</b>	800×700×(850+100)
<b>BV700-100BL</b>	1000×700×(850+100)
<b>BV700-120BL</b>	1200×700×(850+100)
<b>BV700-140BL</b>	1400×700×(850+100)
<b>BV700-160BL</b>	1600×700×(850+100)
<b>BV700-180BL</b>	1800×700×(850+100)
<b>BV700-200BL</b>	2000×700×(850+100)
<b>BV700-220BL</b>	2200×700×(850+100)

# Work Tables & Equipment Stands

## Assembling 1-Sink Table



BV-76/BV-77

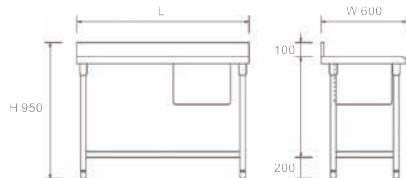


Model:BV-77

Sink Size:400×400×280mm  
Dimension:1500×600×(850+100)mm

## Assembling 1-Sink Table



BV-78/BV-79

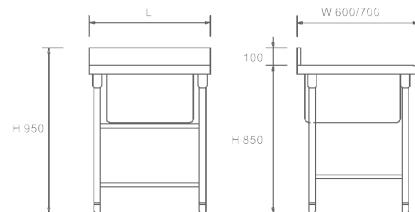

Model:BV-78

Sink Size:400×400×280mm  
Dimension:600×600×(850+100)mm


Model:BV-79

Sink Size:500×500×280mm  
Dimension:700×700×(850+100)mm

## Assembling 2-Sink Table



BV-80

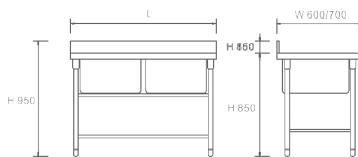

Oil Filter Box

Model	Sink Size (mm)	Dimension L×W×H(mm)
BV-80	400×400×280	1100×600×(850+100)
BV-81	500×500×280	1200×700×(850+100)
BV-82	400×400×280	1500×600×(850+100)
BV-83	500×500×280	1500×700×(850+100)
BV-84	400×400×280	1800×600×(850+100)
BV-85	500×500×280	1800×700×(850+100)

Model:BV-5


Dimension:500×300×300mm



## Assembling 3-Sink Table



BV-86/BV-87

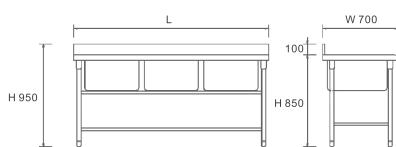

Model:BV-86


Sink Size:500×500×280mm  
Dimension:1800×700×(850+100)mm

Model:BV-87

Sink Size:500×500×280mm  
Dimension:2200×700×(850+100)mm

# Stainless Steel Sink Table

## Stainless Steel Cabinet





Model: BV-43

Dimension: 1800×800×850mm



Model: BV-44

Dimension: 1800×750×(850+100)mm

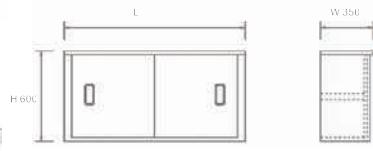

Model

BV-45 1200×350×600

BV-46 1500×350×600

BV-47 1800×350×600

Mobil cabinet with drawers

Mobil Bin Station



Model

Dimension L×W×H(mm)

BV-50 1500×700×850

BV-51 1800×700×850


## Upright Cabinet



Model: BV-48

Dimension: 1200×600×1800mm

## Cabinet With Shelve



Model: BV-52

Dimension: 1500×700×(850+1000)mm

Model: BV-53

Dimension: 1800×700×(850+1000)mm



Model: BV-M1

Dimension: 1160×540×1400mm



Model: BV-M2

Dimension: 1180×550×1260mm

# Wall Shelf & Smoke Hook


## Wall Shelf



## English Smoke Hood

**BV-104**  
**Dimensions:**  
**Length (Custom-made)**  
**×1200×600mm**

## Smoke Water Filtering Hood

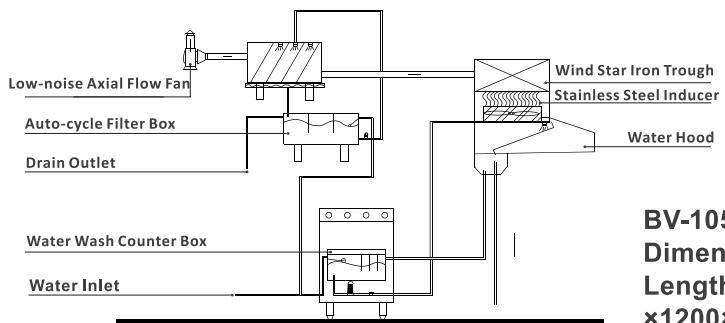

**BV-105**  
**Dimensions:**  
**Length (Custom-made)**  
**×1200×600mm**



**NOTES:**

**NOTES:**

**NOTES:**



## A UNIT OF QTRONIC EQUIPMENTS (I) PVT. LTD.

**Corporate Off:** #11 Ecotech VI, Greater Noida Gautam Budh Nagar-201306

**Cell:** +91 7428237805, +91 7428237806

**Works:** Greater Noida | Patel Nagar, Dehradun

**Email:** qtronicequipments@gmail.com, director.bd@qtronicequipments.co.in

**Website :** [www.qtronicequipments.com](http://www.qtronicequipments.com)

### **DUBAI**

ADD:- A3-27, SAIFZONE | PO BOX124178 | SHARJAH, UAE.

### **KENYA**

ADD:- NEW WORLD HOUSE | LUSAKA ROAD | INDUSTRIAL AREA, NAIROBI KENYA.